
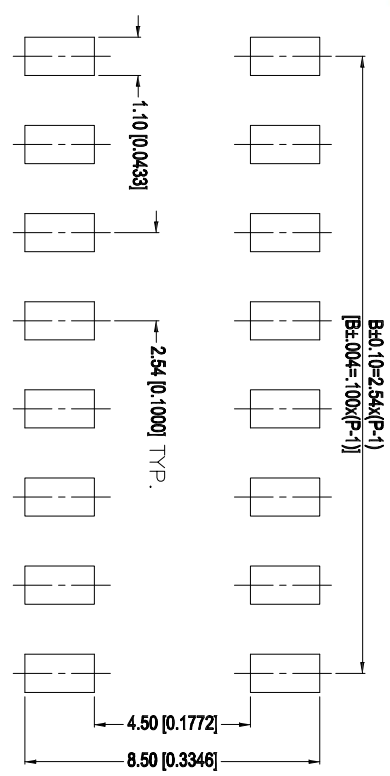
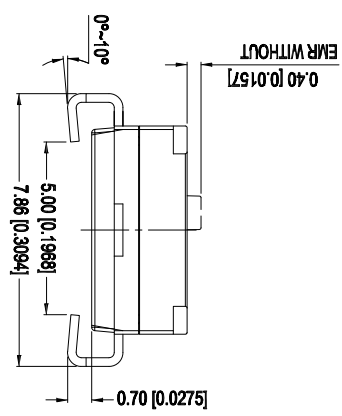


DIMENSIONS : (UNIT : mm/inches)

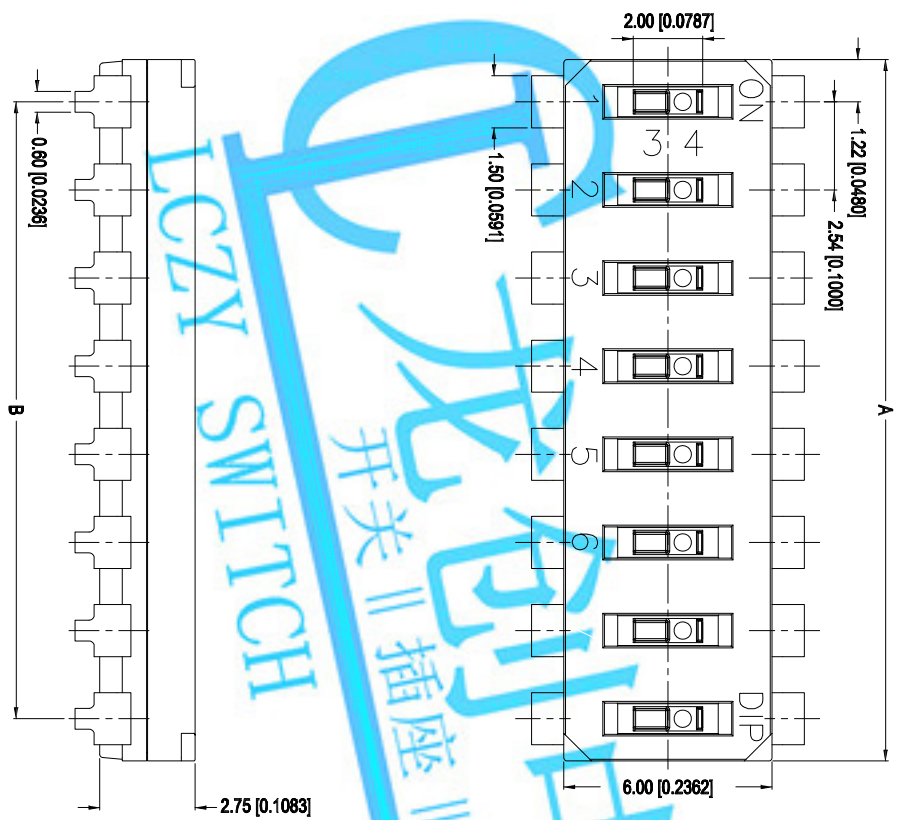

PROD. NO.	NO. OF POS.	DIM. A	DIM. B
EL(P)-02-V	2	4.86[.186]	2.54[.100]
EL(P)-03-V	3	7.52[.286]	5.08[.200]
EL(P)-04-V	4	10.06[.396]	7.62[.300]
EL(P)-05-V	5	12.60[.486]	10.16[.400]
EL(P)-06-V	6	15.14[.596]	12.70[.500]
EL(P)-07-V	7	17.68[.696]	15.24[.600]
EL(P)-08-V	8	20.22[.796]	17.78[.700]
EL(P)-09-V	9	22.76[.896]	20.32[.800]
EL(P)-10-V	10	25.30[.996]	22.86[.900]
EL(P)-12-V	12	30.36[1.186]	27.94[1.100]

SCHEMATIC(TYP.)

(2,3,4,5,6,7,8,9,10,12 POS AVAILABLE)

GENERAL TOLERANCES		UNITS	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
±0.20mm		mm(IN)				
		MAT'L				
		SEE NOTE				
		FINISH				
		SEE NOTE				
		Q'TY	DR: <i>Rocky</i> 2016/03/14	DWG NO.:	ATD-EJ	
			CHKD: <i>Rocky</i> 2016/03/14	SCALE	SHEET	REV.
			APPD:	10:1	1/1	A
						CUSTOMER DRAWING

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE WRITTEN CONSENT OF ACCURATE INNOTECH INC.