

PART NO:

RS ☐ - ☐ - ☐ - ☐ - ☐

Seal:

☐=Top Tape Sealed

Color of cover:

☐=Blue

☐=Red


☐=Black

Number of positions:


Actuator Type:

☐=Recessed Actuator


DIMENSION:(UNIT:mm/inches)

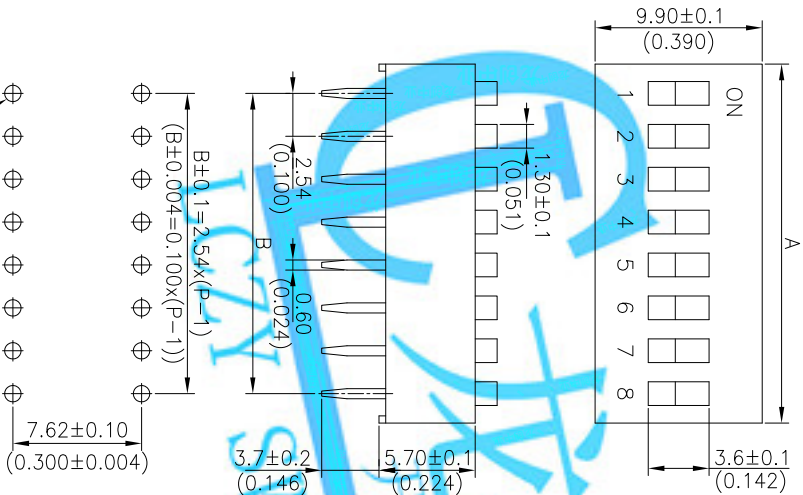


P.C.B. LAYOUT




CIRCUIT DIAGRAM



RS SERIES



RSR SERIES

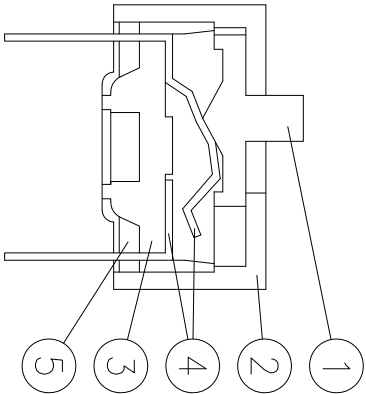

CONSTRUCTION

Prod No.	No.ofPOS	DIM.A	DIM.B
RS/RSR-01	01	3.84(0.151)	-----
RS/RSR-02	02	6.08(0.239)	2.54(0.100)
RS/RSR-03	03	8.92(0.351)	5.08(0.200)
RS/RSR-04	04	11.16(0.439)	7.62(0.300)
RS/RSR-05	05	13.70(0.539)	10.16(0.400)
RS/RSR-06	06	16.24(0.639)	12.70(0.500)
RS/RSR-07	07	19.08(0.751)	15.24(0.600)
RS/RSR-08	08	21.32(0.839)	17.78(0.700)
RS/RSR-09	09	24.16(0.951)	20.32(0.800)
RS/RSR-10	10	26.40(1.039)	22.86(0.900)
RS/RSR-12	12	31.48(1.239)	27.94(1.100)

ITEM	DES	MATERIALS	TREATMENT
1	ACTUATOR	UL94V-0 PBT THERMOPLASTIC	WHITE
2	COVER	UL94V-0 PBT THERMOPLASTIC	BLUE, RED,BLACK
3	BASE	UL94V-0 PBT THERMOPLASTIC	BLACK
4	TERMINAL	PHOSPHOR BRONZE	GOLD PLATING
5	POTTING	EXPOXY	BLACK

尺寸範圍	容許值	UNITS mm(IN)	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
0-4	±0.05	MAT'L	TITLE: SLIDE TYPE DIP SWITCH			
4-16	±0.1	FINISH	PART NO.: RS/RSR SERIES			
16-50	±0.15	SEE NOTE	DR: <i>Sticky</i> 2014/04/08			
Q'TY			CHKD: <i>Sticky</i> 2014/04/08		DWG NO.: ATR-RS	
			APPD:		SCALE 1:1	
					SHEET 1/1	
					REV. A	
					CUSTOMER DRAWING	

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR IN ANY MANNER, WITHOUT THE WRITTEN PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.