






RoHS
Compliant
2002/95/EC



REV.	ECN.	NO.	APPD.

DIMENSIONS

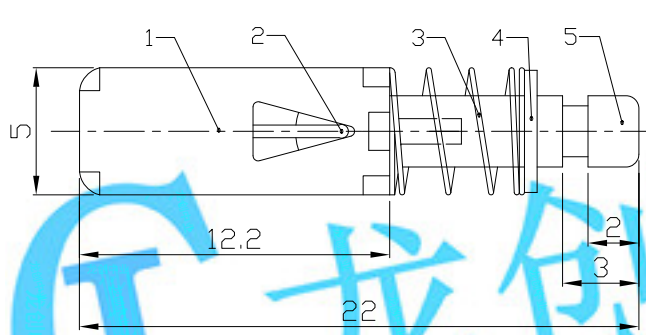

P.C.B LAYOUT
BOTTOM VIEW

CIRCUIT DIAGRAM

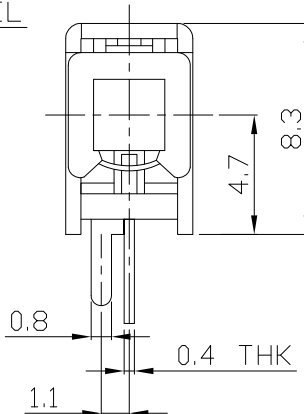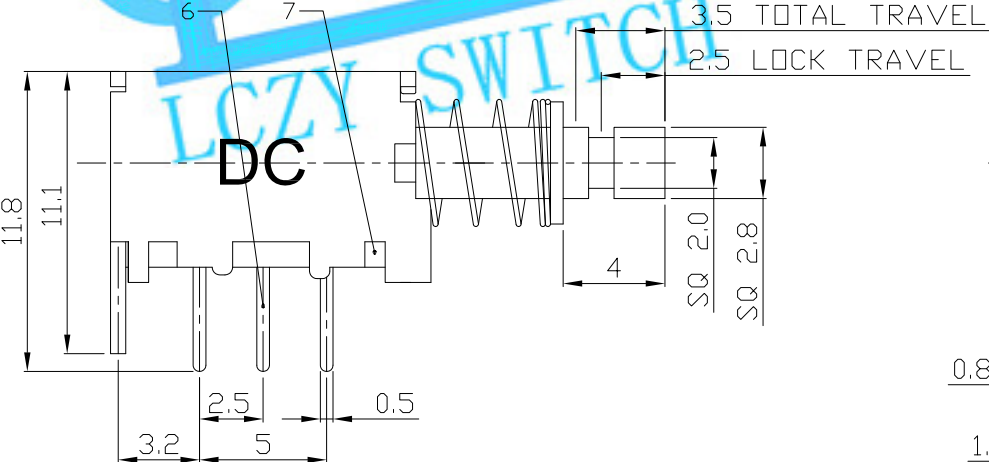

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	1P2T
CONTACT RESISTANCE	30mΩ MAX.
TIMING	NON-SHORTING
OPERATING MODE	SELF-LOCK
STROKE	FULL 3.5mm LOCK 2.5mm
OPERATING FORCE	250±100gf
OPERATING LIFE(cycles)	10,000

9	CONTACT CLIP	PBS C5210R-EH	1	Ag CLAD	WITHIN 1.5mm: ±0.1mm	UNITS mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED						
8	SPRING PLATE	PBS STRIP	1	NATURAL	OVER 1.5mm: ±0.2mm	MAT'L							
7	BASE	PHENOLIC RESIN	1	NATURAL		SEE NOTE	TITLE: PUSH SWITCH / HORIZONTAL		PART NO.: AP-12E06L				
6	TERMINAL	BRASS STRIP	3	Ag PLATED OVER Ni PLATE			DR: Ricky 2017/05/12		DWG NO.: AZJ-12E06				
5	KNOB	POM	1	BLUE/BLACK		FINISH	CHKD: Ricky 2017/05/12		SCALE SHEET REV. CUSTOMER				
4	BLOCK	STEEL STRIP	1	Ni PLATED		SEE NOTE	APPD:		3:1 1/1 A DRAWING				
3	SPRING	STEEL WIRE	1	Ni PLATED	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.	Q'TY							
2	CAM STICK	PBS WIRE	1	NATURAL									
1	FRAME	STEEL STRIP	1	Ni PLATED									
NO.	PARTS	MATERIAL	Q'TY	FINISHING									
1		2		3		4		5		6		7	