
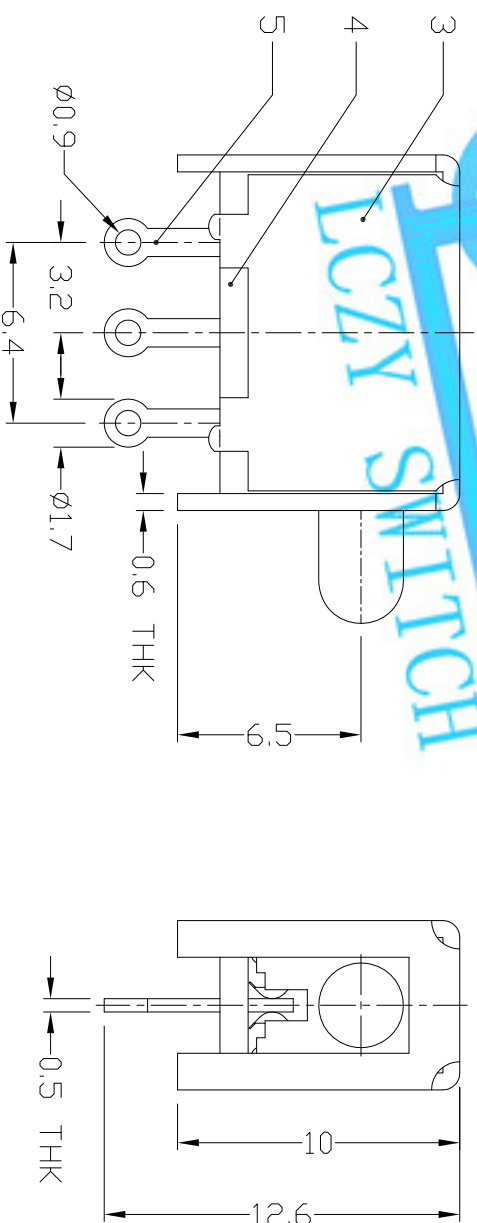
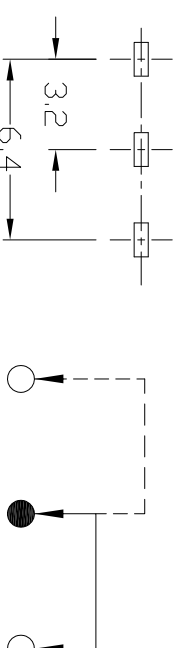


DIMENSIONS

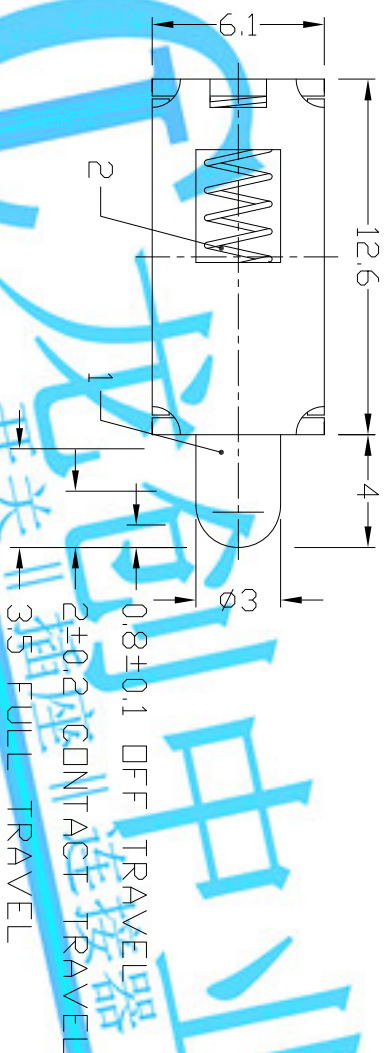

RATING	DC50V 0.3A		
CIRCUIT	1P2T		
CONTACT RESISTANCE	100mΩ MAX.		
TIMING	NON-SHORTING		
OPERATING MODE	NON-LOCK		
STROKE	OFF 0.8H0.1	FULL 3.5mm	CONTACT 2H
OPERATING FORCE	70±20gf		
OPERATING LIFE(cycles)	10,000		

LONGCHUANG ZHONGYE (HK)CO.,LIMITED									
TITLE:				PART NO:					
PUSH SWITCH / HORIZONTAL				AP-12F03-A-N					
DR: <i>Jacky</i> 2015/03/30				DWG NO: ADL-12F03-A					
CHKD: <i>Jacky</i> 2015/03/30				SCALE SHEET REV. CUSTOMER					
APPD:				3:1			1/1 A DRAWING		
UNITS mm									
MATE'L									
SEE NOTE									
FINISH									
SEE NOTE									
WITHIN 1.5mm±0.1mm									
OVER 1.5mm±0.2mm									
8									
7									
6	CONTACT CLIP	PBS STRIP	1	AG PLATED					
5	TERMINAL	BRASS STRIP	3	AG PLATED					
4	BASE	PBENDLIC RESIN	1	NATURAL					
3	FRAME	STEEL STRIP	1	NI PLATED					
2	SPRING	STEEL WIRE	1	NATURAL					
1	KNOB	POM	1	BLACK					
NO.	PARTS	MATERIAL	Q'TY	FINISHING	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE WRITTEN CONSENT OF ACCURATE INNOTECH INC.				