
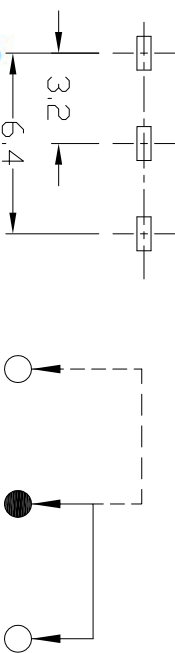


DIMENSIONS

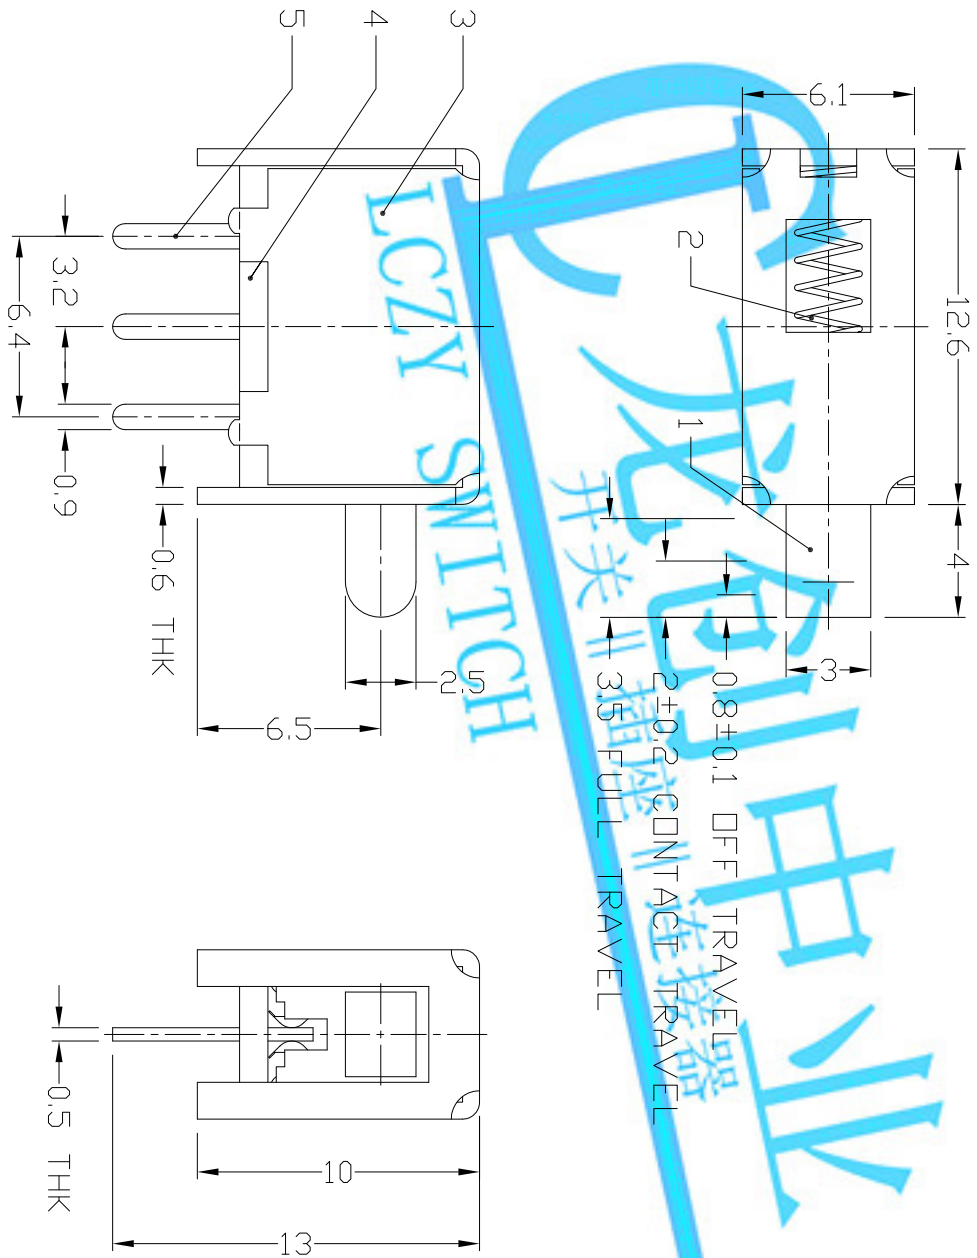

P.C.B LAYOUT

CIRCUIT DIAGRAM

BOTTOM VIEW

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	DC50V 0.3A		
CIRCUIT	1P2T		
CONTACT RESISTANCE	100mΩ MAX.		
TIMING	NON-SHORTING		
OPERATING MODE	NON-LOCK		
STROKE	OFF 08±0.1	FULL 35mm	CONTACT 2±0.2
OPERATING FORCE	70±20gf		
OPERATING LIFE(cycles)	10,000		

8					WITHIN 1.5mm±0.1mm	UNITS	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
7					OVER 1.5mm±0.2mm	mm				
6	CONTACT CLIP	PBS STRIP	1	Ag PLATED		MAT'L				
5	TERMINAL	BRASS STRIP	3	Ag PLATED		SEE NOTE				
4	BASE	PHENOLIC RESIN	1	NATURAL		FINISH				
3	FRAME	STEEL STRIP	1	Ni PLATED		SEE NOTE	TITLE:	PUSH SWITCH / HORIZONTAL	PART NO.:	AP-12F03N
2	SPRING	STEEL WIRE	1	NATURAL		DR:	DR:	2015/03/30	DWG NO.:	ADL-12F03
1	KNOB	POM	1	BLACK		Q'TY	CHKD:	2015/03/30	SCALE	SHEET 1/1
NO.	PARTS	MATERIAL	Q'TY	FINISHING			APPD:		REV.	A
									CUSTOMER	DRAWING