



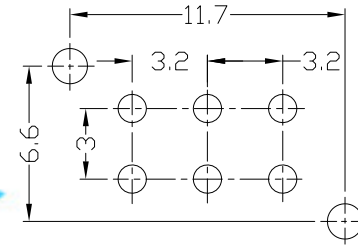


RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.



DIMENSIONS

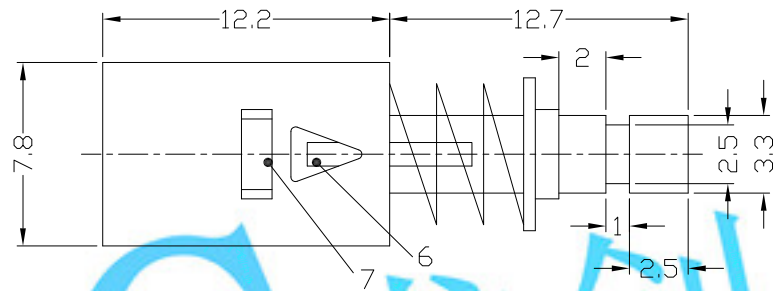

P.C.B LAYOUT
BOTTOM VIEW



CIRCUIT DIAGRAM

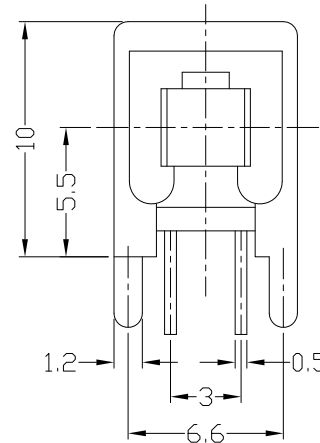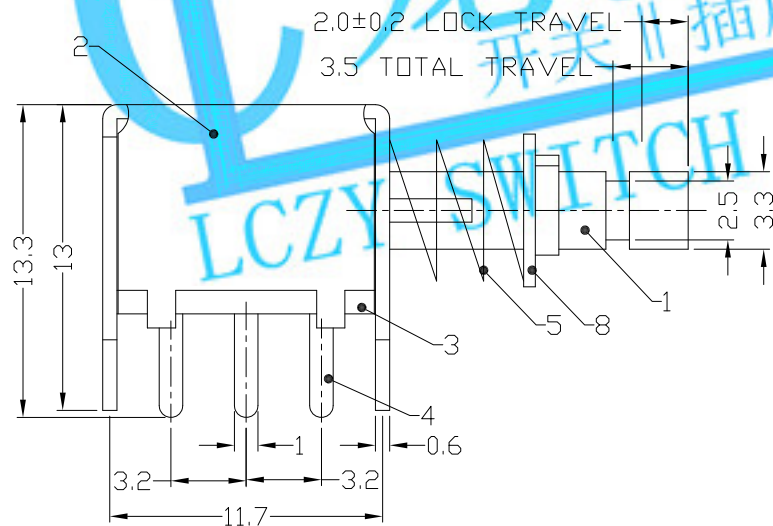

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	DC50V 0.3A	
CIRCUIT	2P2T	
CONTACT RESISTANCE	100mΩ MAX.	
TIMING	NON-SHORTING	
OPERATING MODE	SELF-LOCK	AP-22F02L
	NON-LOCK	AP-22F03N
STROKE	FULL 3.5mm	LOCK 2.0mm
OPERATING FORCE	250±100gf	
OPERATING LIFE(cycles)	10,000	

9	CLIP	PBS	2	Ag PLATED	WITHIN 1.5mm: ±0.1mm
8	BLOCK	MILD STEEL	1	Ni PLATED	OVER 1.5mm: ±0.2mm
7	SPRING PLATE	PBS	1	NATURAL	
6	CAM STICK	BRASS	1	Ni PLATED	
5	SPRING	SUS	1	Ni PLATED	
4	TERMINAL	BRASS	6	Ag PLATED	
3	TERMINAL CASE	PHENOLIC RESIN	1	NATURAL	
2	COVER	MILD STEEL	1	Ni PLATED	
1	KNOB	PBT	1	BLACK	
NO.	PARTS	MATERIAL	Q'TY	FINISHING	

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

UNITS	mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
MAT'L	SEE NOTE				
FINISH	SEE NOTE	TITLE: PUSH SWITCH / HORIZONTAL		PART NO.: AP-22F02L & AP-22F03N	
Q'TY	SEE NOTE	DR: Ricky 2017/05/12		DWG NO.: AZJ-22F0203	
		CHKD: Ricky 2017/05/12			
		APPD:		SCALE	SHEET
				3:1	1/1
				REV.	CUSTOMER
				A	DRAWING