
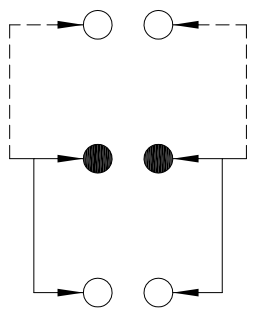



DIMENSIONS

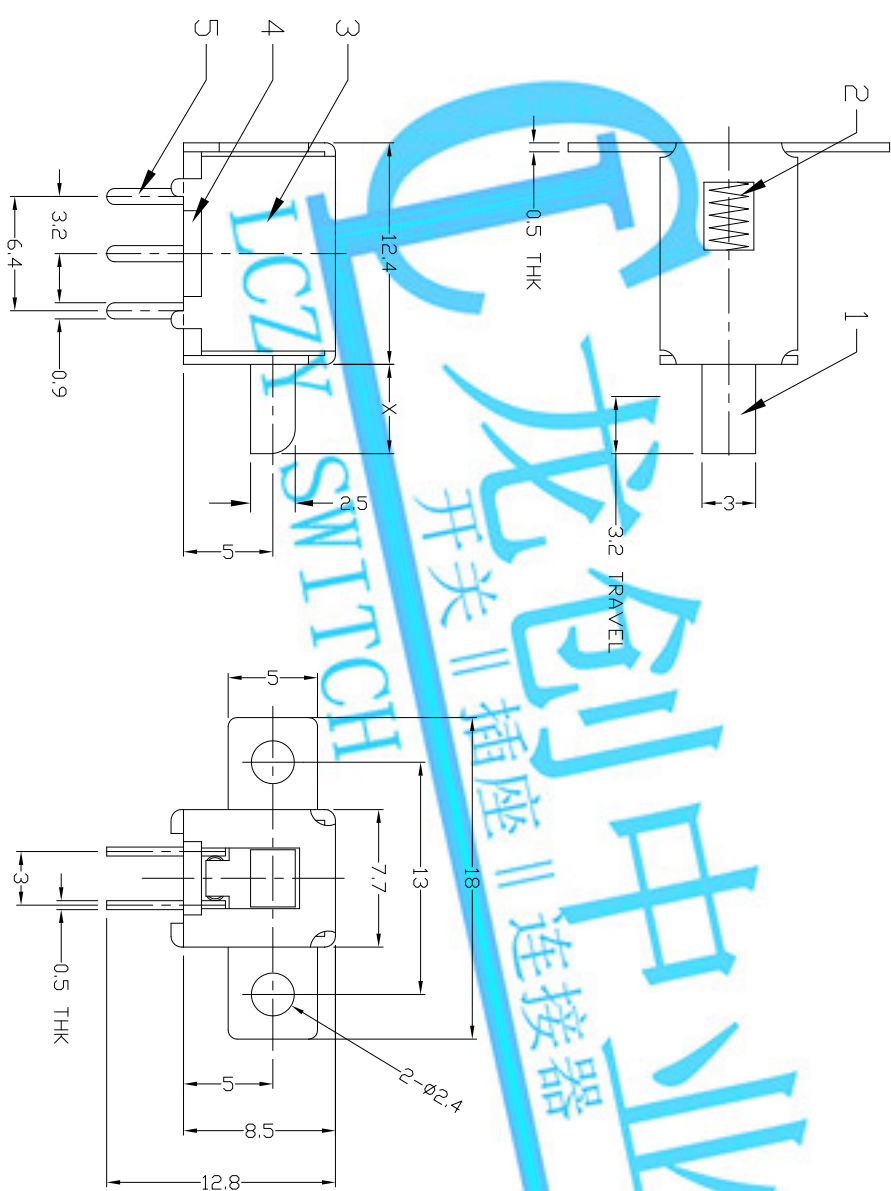

P.C.B LAYOUT
BOTTOM VIEW
CIRCUIT DIAGRAM

ELECTRD-MECHANICAL CHARACTERISTICS
Refer to additional specifications

RATING	DC50V 0.3A
CIRCUIT	2P2T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
OPERATING MODE	NON-LOCK
STROKE	FULL 3.2mm
OPERATING FORCE	100±30gf
OPERATING LIFE(cycles)	10,000

8					WITHIN 1.5mm;±0.1mm	UNITS	LONGCHUANG ZHONGYE (HK)CO.,LIMITED
7					OVER 1.5mm;±0.2mm	mm	
6	CONTACT CLIP	PBS STRIP	2	Ag PLATED	MAT'L	TITLE: PUSH SWITCH / HORIZONTAL	
5	TERMINAL	BRASS STRIP	6	Ag PLATED	SEE NOTE		
4	BASE	PHENOLIC RESIN	1	NATURAL	FINISH	DWG NO.: ADL-22F04	
3	FRAME	STEEL STRIP	1	Ni PLATED	SEE NOTE		
2	SPRING	STEEL WIRE	1	NATURAL	Q'TY	APPD: 2/1	
1	KNDB	PDM	1	BLACK			
ND.	PARTS	MATERIAL	Q'TY	FINISHING		REV. A	
					THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR OTHERWISE USED WITHOUT THE WRITTEN CONSENT OF ACCURATE INNOTECH INC.		