
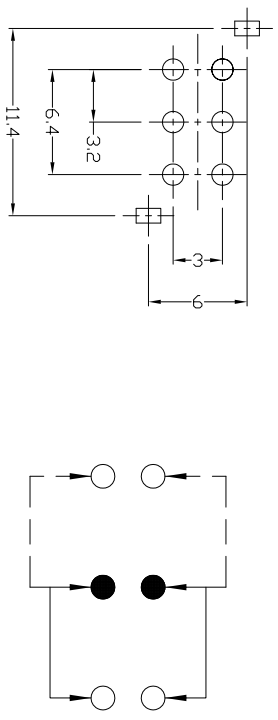


DIMENSIONS

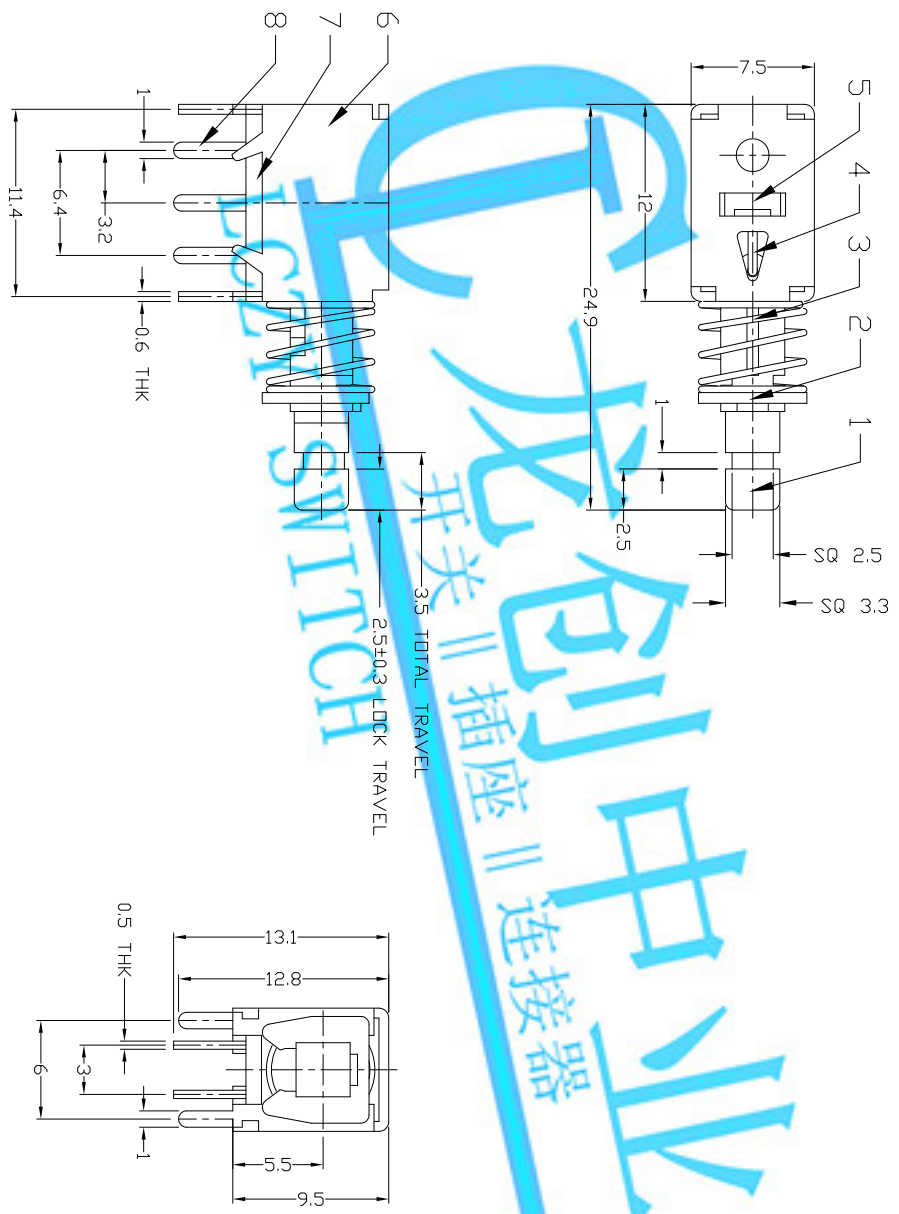

P.C.B LAYOUT
BOTTOM VIEW

CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	DC12V 3A	
CIRCUIT	2P2T	
CONTACT RESISTANCE	100mΩ MAX.	
TIMING	NON-SHORTING	
OPERATING MODE	SELF-LOCK	
STROKE	TOTAL 35mm	LOCK 2.5mm±0.3
OPERATING FORCE	250±100gf	
OPERATING LIFE(cycles)	10,000	

9	CONTACT CLIP	PBS CS210R-EH	2	AG PLATED	WITHIN 1.5mm±0.1mm	UNITS	mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
8	TERMINAL	BRASS STRIP	6	AG PLATED OVER NI PLATED	OVER 1.5mm±0.2mm	MAT'L	SEE NOTE				
7	BASE	PHENOLIC RESIN	1	NATURAL		SEE NOTE					
6	FRAME	STEEL STRIP	1	NI PLATED		FINISH	SEE NOTE				
5	SPRING PLATE	PBS STRIP	1	NATURAL		TITLE:	PUSH SWITCH / HORIZONTAL				
4	CAM STICK	PBS WIRE	1	NATURAL		DR:	2015/04/02	PART NO.:		AP-22F43L	
3	SPRING	STEEL WIRE	1	NI PLATED		CHKD:	2015/04/02	DWG NO.:		ADL-22F43	
2	BLOCK	STEEL STRIP	1	NI PLATED		Q'TY	1	SCALE		SHEET 1/1	
1	KNOB	NYLON+F.G+94V0	1	BLACK		APPD:		REV.		A	
NO.	PARTS	MATERIAL	Q'TY	FINISHING				CUSTOMER		DRAWING	