


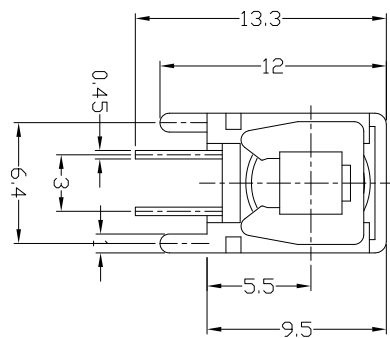


DIMENSIONS

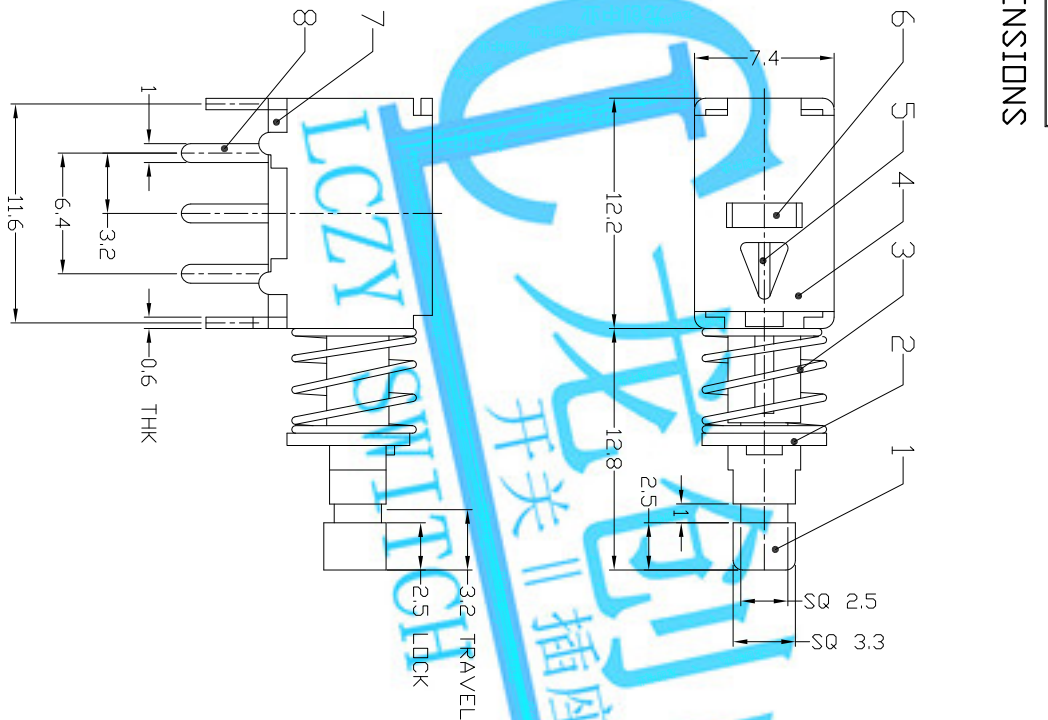

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	DC50V 0.3A	
CIRCUIT	2P2T	
CONTACT RESISTANCE	30mΩ MAX.	
TIMING	NON-SHORTING	
OPERATING MODE	SELF-LOCK	
STROKE	FULL 3.2mm	LOCK 2.5mm
OPERATING FORCE	300±100gf	
OPERATING LIFE(cycles)	10,000	

LONGCHUANG ZHONGYE (HK)CO.,LIMITED											
TITLE: PUSH SWITCH / HORIZONTAL					PART NO.: AP-22F 44L						
DR: Ricky 2015/03/27					DWG NO.: ADJ-22F 44						
CHKD: Ricky 2015/03/27					SCALE		SHEET		REV.		
APPD:					2:1		1/1		A		
					CUSTOMER DRAWING						
9	CONTACT CLIP	PBS C5210-EH	2	Ag CLAD	WITHIN 1.5mm: ±0.1mm OVER 1.5mm: ±0.2mm					UNITS	mm
8	TERMINAL	BRASS STRIP	6	(0.5 μm) Ag PLATED						MAT'L	
7	BASE	PHENOLIC RESIN	1	NATURAL						SEE NOTE	
6	SPRING PLATE	PBS STRIP	1	NATURAL							
5	CAM STICK	PBS WIRE	1	Ni PLATED	FINISH						
4	FRAME	STEEL STRIP	1	Ni PLATED	SEE NOTE						
3	SPRING	STEEL WIRE	1	Ni PLATED	Q'TY						
2	BLOCK	STEEL STRIP	1	Ni PLATED							
1	KNDB	POM/NYLON+G	1	BLACK/BLUE/YELLOW							
ND.	PARTS	MATERIAL	Q'TY	FINISHING							
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.											
