





DIMENSIONS

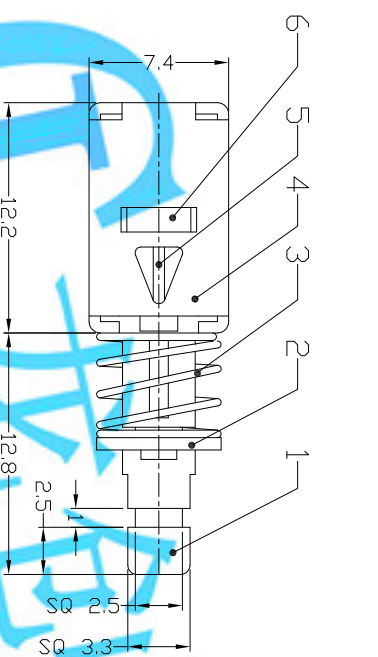

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

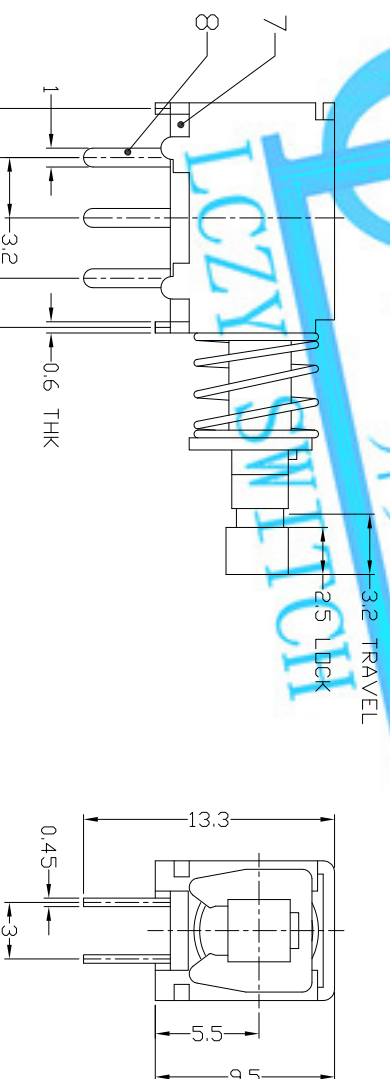

RATING	DC50V 0.3A	
CIRCUIT	2P2T	
CONTACT RESISTANCE	30mΩ MAX.	
TIMING	NON-SHORTING	
OPERATING MODE	SELF-LOCK	
STROKE	FULL 3.2mm	LOCK 2.5mm
OPERATING FORCE	300±100gf	
OPERATING LIFE(cycles)	10,000	

LONGCHUANG ZHONGYE (HK)CO.,LIMITED									
TITLE:				PART NO.:					
PUSH SWITCH / HORIZONTAL				AP-22F74L					
DR: <i>Rocky</i> 2015/03/27				DWG NO.: ADJ-22F74					
CHKD: <i>Rocky</i> 2015/03/27				SCALE SHEET REV. CUSTOMER DRAWING					
APPD:				2:1 1/1 A					
UNITS mm									
MTRL									
SEE NOTE									
FINISH									
SEE NOTE									
WITHIN 1.5mm: ±0.1mm									
OVER 1.5mm: ±0.2mm									
9 CONTACT CLIP				2		Ag CLAD			
8 TERMINAL				6		(0.5 μm) Ag PLATED			
7 BASE				1		NATURAL			
6 SPRING PLATE				1		NATURAL			
5 CAM STICK				1		Ni PLATED			
4 FRAME				1		Ni PLATED			
3 SPRING				1		Ni PLATED			
2 BLOCK				1		Ni PLATED			
1 KNOB				1		BLACK/BLUE/YELLOW			
MATERIAL				POM/NYLON+G					
Q'TY				FINISHING					
PARTS									