
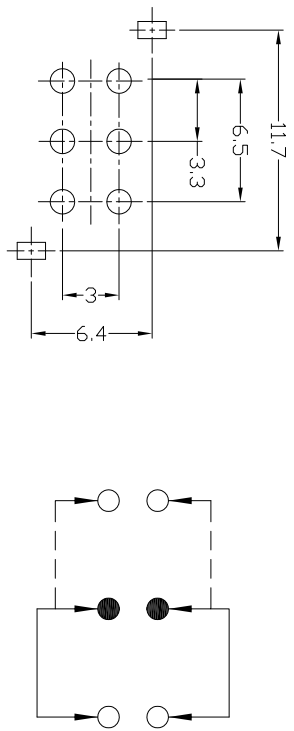


DIMENSIONS

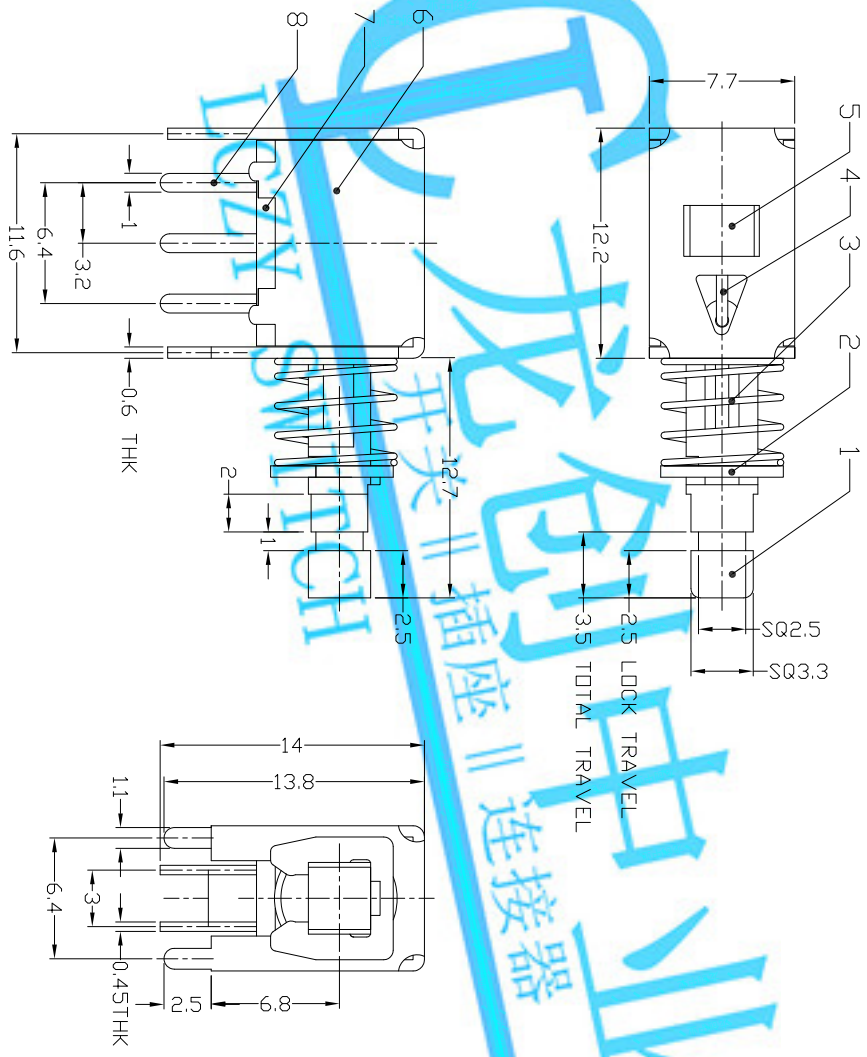

P.C.B LAYOUT
BOTTOM VIEW

ELECTRO-MECHANICAL CHARACTERISTICS
Refer to additional specifications

RATING	DC50V 0.3A	
CIRCUIT	2P2T	
CONTACT RESISTANCE	30mΩ MAX.	
TIMING	NON-SHORTING	
OPERATING MODE	SELF-LOCK	
STROKE	FULL 3.5mm	LOCK 2.5mm
OPERATING FORCE	300±100gf	
OPERATING LIFE(cycles)	10,000	

9	CONTACT CLIP	PBS STRIP	2	Ag CLAD	WITHIN 1.5mm: ±0.1mm	UNITS	mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED		
8	TERMINAL	BRASS STRIP	6	Ag PLATED OVER Ni PLATED	OVER 1.5mm: ±0.2mm	MAT'L				
7	BASE	PHENOLIC RESIN	1	NATURAL		SEE NOTE				
6	FRAME	STEEL STRIP	1	Ni PLATED OVER Cu PLATED		TITLE:				
5	SPRING PLATE	PBS STRIP	1	NATURAL		FINISH		PART NO.: AP-22F85L		
4	CAM STICK	PBS WIRE	1	NATURAL		SEE NOTE				
3	SPRING	STEEL WIRE	1	Ni PLATED		DR:	Rocky 2015/03/27			
2	BLOCK	STEEL STRIP	1	Ni PLATED OVER Cu PLATED		CHKD:	Rocky 2015/03/27			
1	KNOB	NYLON+94VO+FG	1	BLACK		Q'TY		DWG NO.: ADJ-22F85		
NO.	PARTS	MATERIAL	Q'TY	FINISHING		APPD:				
								SCALE	SHEET	REV.
								5:2	1/1	A
								CUSTOMER DRAWING		