
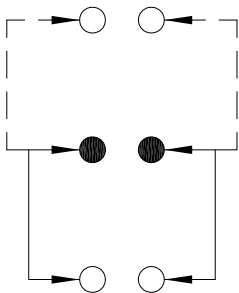



DIMENSIONS

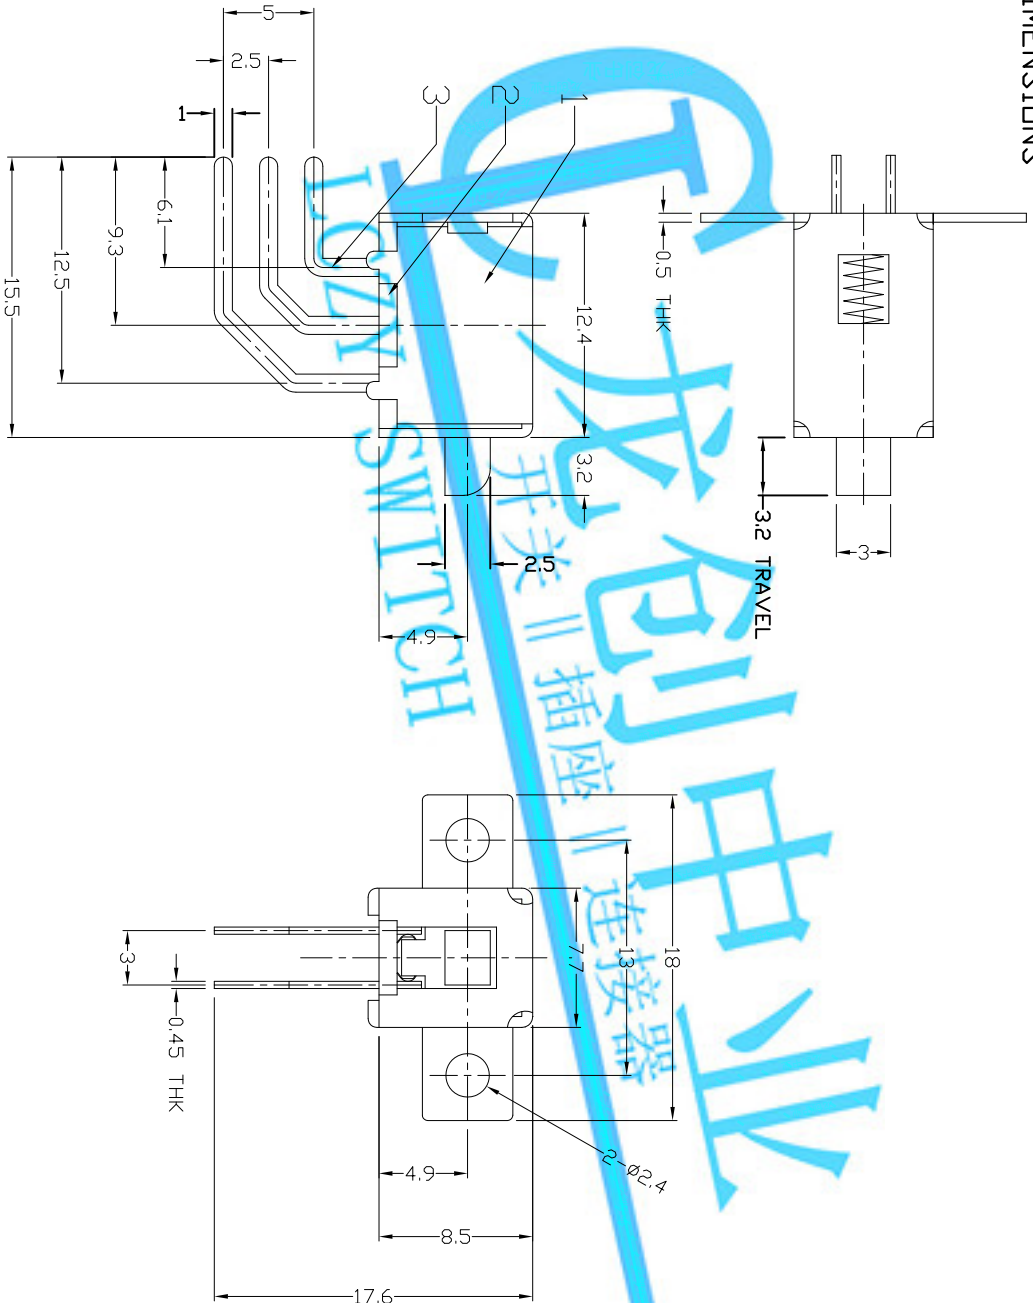

P.C.B LAYOUT
BOTTOM VIEW

CIRCUIT DIAGRAM

ELECTRD-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	DC50V 0.3A
CIRCUIT	2P2T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
OPERATING MODE	NON-LOCK
STROKE	FULL 3.2mm
OPERATING FORCE	100±30gf
OPERATING LIFE(cycles)	10,000

8				WITHIN 1.5mm±0.1mm	UNITS	LONGCHUANG ZHONGYE (HK)CO.,LIMITED TITLE: PUSH SWITCH / HORIZONTAL PART NO.: AP-22F94N DWG NO.: ADL-22F94 SCALE: 1/1 SHEET: A REV.: CUSTOMER DRAWING			
7	STEEL WIRE	1	NATURAL	OVER 1.5mm±0.2mm	MAT'L				
6	SPRING	1	BLACK		SEE NOTE				
5	KNOB	1	AG PLATED		FINISH				
4	CONTACT CLIP	2	AG PLATED		SEE NOTE				
3	TERMINAL	6	NATURAL		Q'TY	DR: Ricky 2015/04/02	CHKD: Ricky 2015/04/02	APPD:	
2	BASE	1	Ni PLATED						
1	FRAME	1	FINISHING						
ND.	PARTS								