


DIMENSIONS

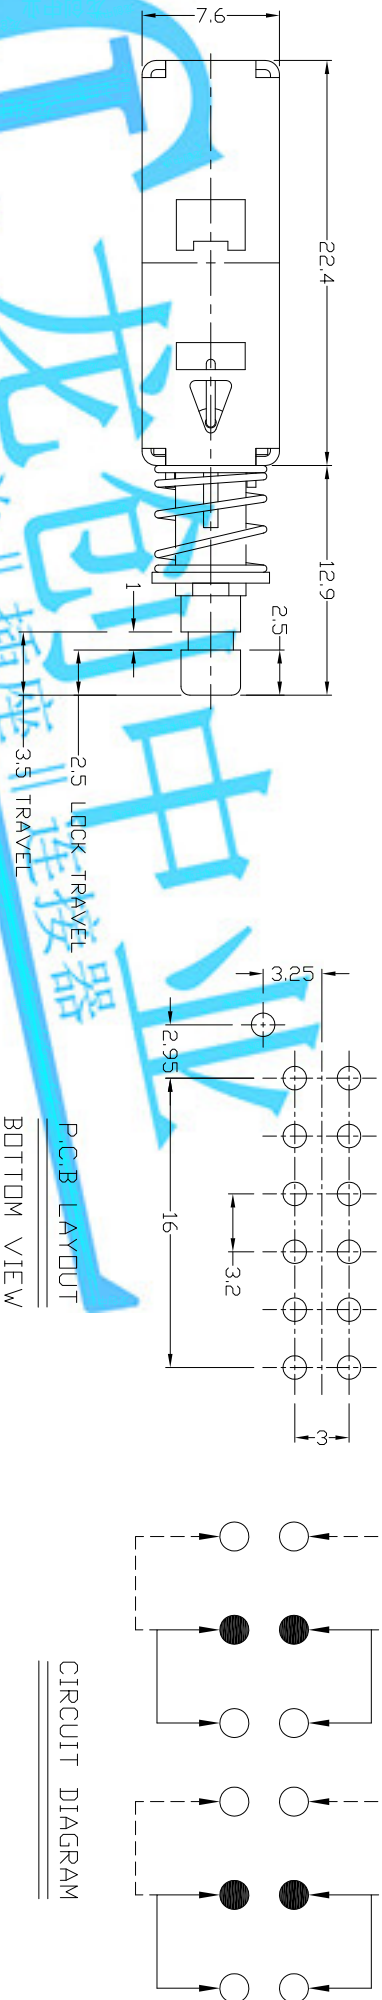

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	DC50V 0.3A	
	4P2T	
CONTACT RESISTANCE	100mΩ MAX.	
	NON-SHORTING	
OPERATING MODE	SELF-LOCK	AP-42F42L
	NON-LOCK	AP-42F43N
STROKE	TOTAL 3.5mm	LOCK 2.5mm
OPERATING FORCE	350±100gf	
	OPERATING LIFE(cycles)	
	10,000	

9	SPRING PLATE	PBS STRIP	1	NATURAL	WITHIN 1.5mm±0.1mm	UNITS	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
8	CAM STICK	BRASS WIRE	1	NI PLATED	OVER 1.5mm±0.2mm	mm				
7	CONTACT CLIP	PBS STRIP	4	Ag PLATED		MAT'L				
6	FRAME	STEEL STRIP	1	NI PLATED		SEE NOTE				
5	BASE	PHENOLIC RESIN	1	NATURAL		FINISH				
4	TERMINAL	BRASS STRIP	12	Ag PLATED		SEE NOTE	TITLE: PUSH SWITCH / HORIZONTAL			
3	SPRING	STEEL WIRE	1	NI PLATED		DR: 2015/04/08				
2	BLOCK	STEEL STRIP	1	NI PLATED		CHKD: 2015/04/08				
1	KNOB	POM	1	BLACK		APPD: 2015/04/08				
ND.	PARTS	MATERIAL	Q'TY	FINISHING		APPD: 2015/04/08				
1							THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE WRITTEN CONSENT OF ACCURATE INNOTECH INC.			
1										
1										
1										
1										
1							DWG NO: ADL-42F4243			
1										
1										
1										
1										
1							SCALE SHEET REV. A			
1										
1										
1										
1										
1							CUSTOMER DRAWING			
1										
1										
1										
1										