






REV.	ECN.	NO.	APPD.

DIMENSIONS

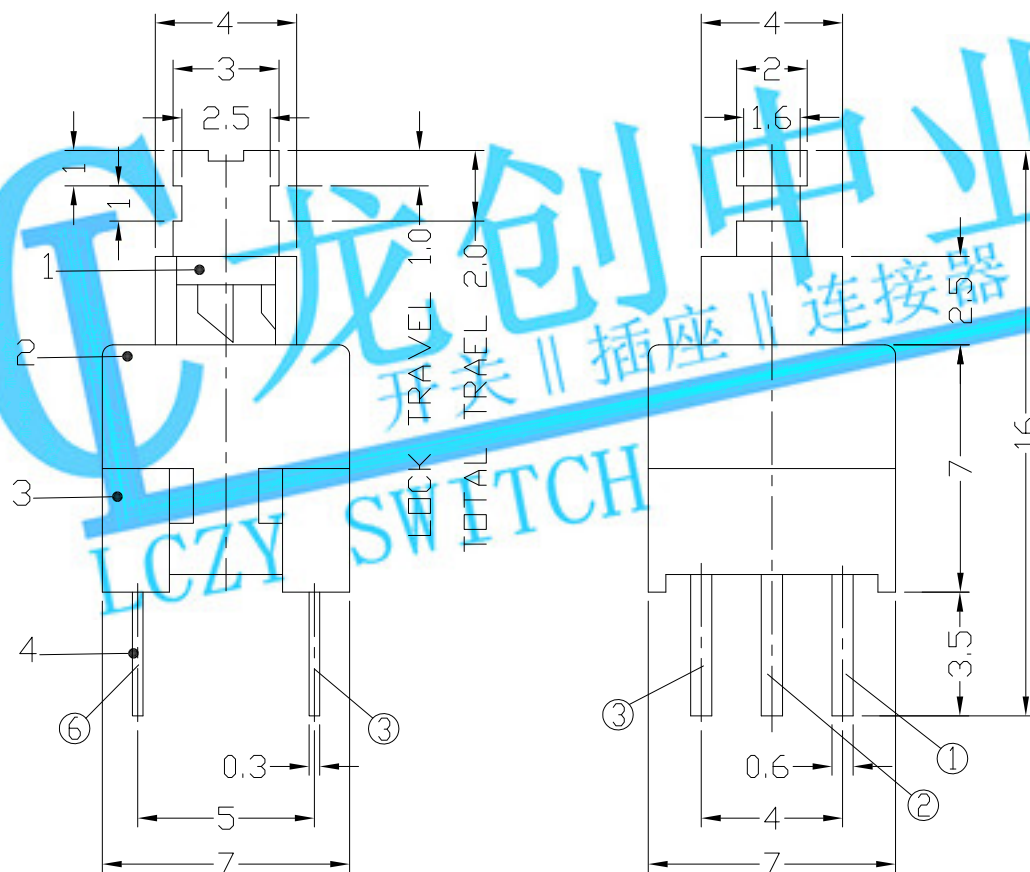

P.C.B LAYOUT

TOP VIEW



CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	DC30V 0.1A		
CIRCUIT	2P2T		
CONTACT RESISTANCE	50mΩ MAX.		
TIMING	NON-SHORTING		
OPERATING MODE	SELF-LOCK	AP-2212L	
	NON-LOCK	AP-2212N	
STROKE	FULL 2.0mm	LOCK 1.0mm	
OPERATING FORCE	140±30gf	200±100gf	250±100gf
OPERATING LIFE(cycles)	10,000		

7	CLIP	PBS	2	Ag CLAD	WITHIN 1.5mm:±0.1mm	UNITS mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED					
6	SPRING	SUS WIRE	1	NATURAL	OVER 1.5mm:±0.2mm	MAT'L						
5	LOCK PIN	SUS WIRE	1	Ni PLATED		SEE NOTE	TITLE:	PART NO.:				
4	TERMINAL	BRASS STRIP	6	Ag PLATED		FINISH	PUSH SWITCH / VERTICAL	AP-2212L & AP-2212N				
3	CASE	NYLON+F.G	1	BLACK		SEE NOTE	DR:	<i>Ricky</i> 2017/05/15	DWG NO.:			
2	COVER	POM	1	WHITE	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.	Q'TY	CHKD:	<i>Ricky</i> 2017/05/15	AZJ-2212			
1	KNOB	POM	1	BLUE				SCALE	SHEET	REV.	CUSTOMER	
NO	PARTS	MATERIAL	QTY	FINISHING			APPD:	5:1	1/1	A	DRAWING	