
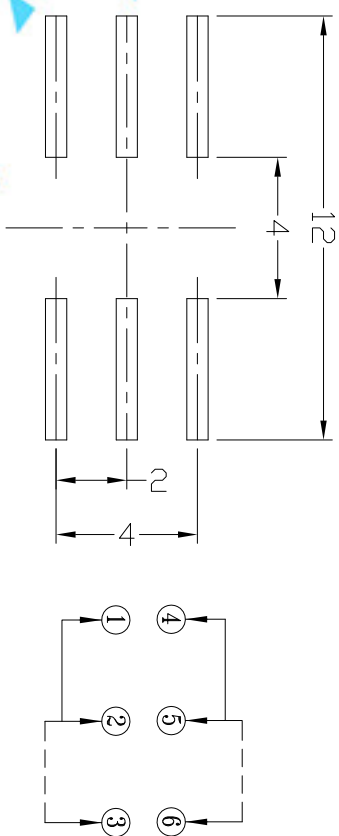


DIMENSIONS

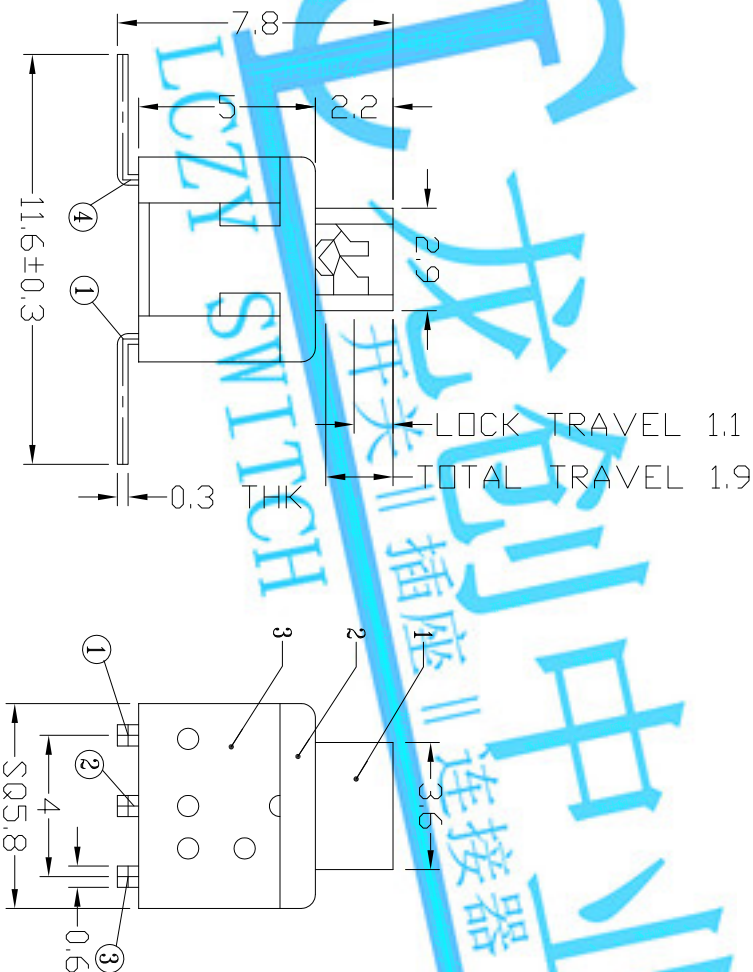

P.C.B LAYOUT

CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	DC12V 0.1A	
CIRCUIT	2P2T	
CONTACT RESISTANCE	70mΩ MAX.	
TIMING	NON-SHORTING	
OPERATING MODE	SELF-LOCK	AP-2216SFL
	NON-LOCK	AP-2216SFN
STROKE	FULL 1.9mm	LOCK 1.1mm
OPERATING FORCE	150±50gf	250±100gf
	OPERATING LIFE(cycles)	
	10,000	

LONGCHUANG ZHONGYE (HK)CO.,LIMITED									
UNITS		mm							
WITHIN 1.5mm: ±0.1mm		OVER 1.5mm: ±0.2mm							
6									
5	CAM STICK	SUS	1	NATURAL	TITLE:		PART NO.:		
4	SPRING	SUS	1	NATURAL	SEE NOTE		DWG. NO.:		
3	CASE	NYLON+F.G./BRASS STRIP	1	GREY/Ag PLATED OVER Ni PLATED	PUSH SWITCH / VERTICAL		AP-2216SFL & AP-2216SFN		
2	COVER	PDM	1	BLACK	FINISH		DR: Jockey 2015/03/25		
1	KNDB	PDM/PBS C5210R-EH	1	WHITE/Ag CLAD	SEE NOTE		CHKD: Jockey 2015/03/25		
ND	PARTS	MATERIAL	QTY	FINISHING	Q'TY		APPD: 5-1 1/1 A CUSTOMER DRAWING		