

DIMENSIONS





P.C.B MOUNTING PATTERN DIMENSION

CIRCUIT DIAGRAM

MODEL CODE

AT-1102L-

	H	øA
-	4.3	3.5
A	5.0	3.4
B	7.0	3.3
E	7.3	3.3
C	8.0	3.3
Q	6.0	3.4
D	9.5	3.3
F	12.5	3.3
FL	13.0	3.0
G	13.5	3.0
I	17.0	3.0

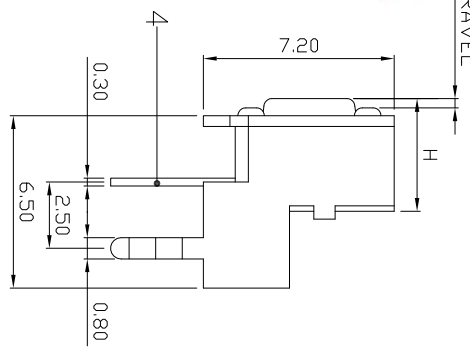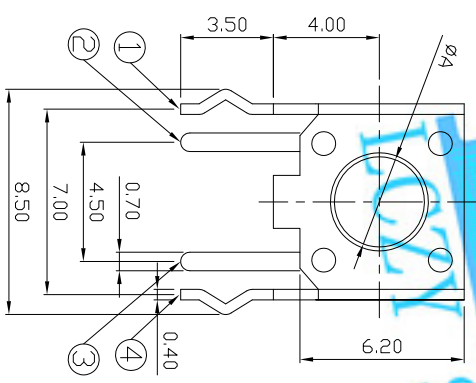

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

Rating	DC 12V 50mA	
Contact Resistance	100mΩ Max.	
Travel	0.25±0.1mm	
Operating Force	100/130/160±50gf	250/320±100gf
Operating Life(cycles)	100,000	

5	CONTACT	PBS CS210R-EH	1	Ag CLAD	WITHIN 1.5mm;±0.1mm	UNITS	mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED TITLE: TACT SWITCH PART NO.: AT-1102L SERIES DR: Ricky 2017/08/03 CHKD: Ricky 2017/08/03 APPD: 2017/08/03 DWG NO.: AZJ-1102L SCALE: 4:1 SHEET: 1/1 REV: A CUSTOMER DRAWING			
4	TERMINAL	BRASS STRIP	2	Ag PLATED	OVER 1.5mm;±0.2mm	MAT'L	SEE NOTE				
3	KNDB	PBT+F.G/NYLON+F.G	1	BLACK		FINISH	SEE NOTE				
2	CASE	PBT+F.G/NYLON+F.G	1	BLACK		Q'TY	APPD:				
1	FRAME	STEEL STRIP	1	Ni PLATED		Q'TY	APPD:				
ND.	PARTS	MATERIAL	Q'TY	FINISHING	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS WITHOUT WRITTEN CONSENT OF ACCURATE INNOTECH INC.						