





RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

DIMENSIONS

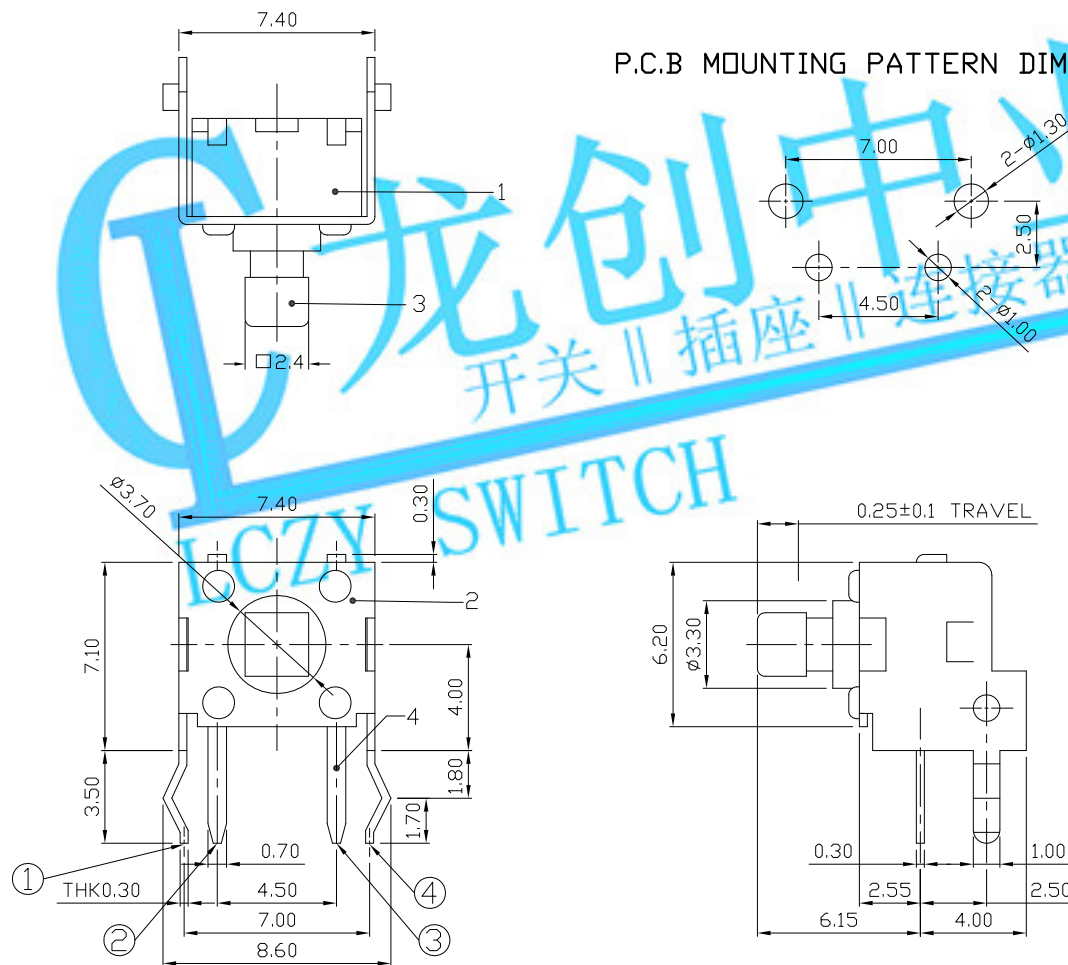

CIRCUIT DIAGRAM



ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

Rating	DC 12V 50mA		
Contact Resistance	100m Ω Max.		
Travel	0.25 $\pm$ 0.1mm		
Operating Force	100/130/160/190 $\pm$ 50gf	250 $\pm$ 100gf	
Operating Life(cycles)	100,000		

5	CONTACT	PBS/SUS	1	Ag CLAD	WITHIN 1.5mm:±0.1mm	UNITS mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED				
4	TERMINAL	BRASS STRIP	2	Ag COATING	OVER 1.5mm:±0.2mm	MAT'L					
3	KNOB	NYLON+F.G	1	BLACK		SEE NOTE	TITLE:	PART NO.:			
2	COVER	STEEL STRIP	1	Ni PLATED		FINISH	TACT SWITCH	AT-1102VT SERIES			
1	CASE	NYLON+F.G	1	BLACK	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.	SEE NOTE	DR:	Ricky 2017/08/03	DWG NO.:		
						Q'TY	CHKD:	Ricky 2017/08/03	AZJ-1102VT		
NO.	PARTS	MATERIAL	Q'TY	FINISHING			APPD:	SCALE	SHEET	REV.	CUSTOMER DRAWING
								4:1	1/1	A	