



DIMENSIONS

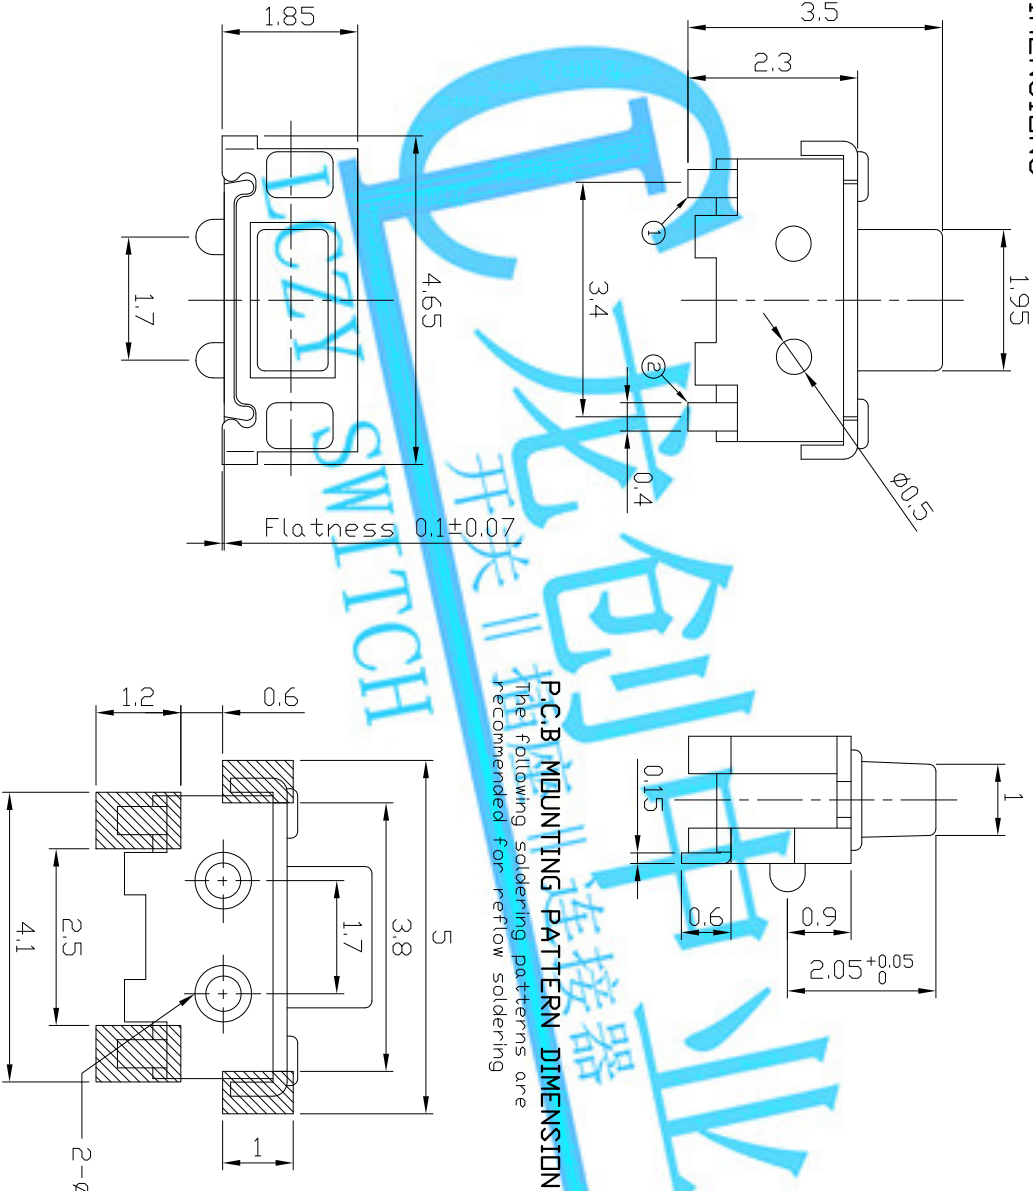


P.C.B MOUNTING PATTERN DIMENSION

The following soldering patterns are recommended for reflow soldering

CIRCUIT DIAGRAM



PRODUCT IMAGE



ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

Rating	DC 12V 50mA
Contact Resistance	100m Ω Max.
Travel	0.15 $\pm$ 0.1mm
Operating Force	160 $\pm$ 50gf
Operating Lifecycles)	100,000

.X ± 0.2		X. $\pm 2^{\circ}$	UNITS	mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED	
			MAT'L			
			SEE NOTE			
			FINISH			
			SEE NOTE			
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE WRITTEN CONSENT OF ACCURATE INNOTECH INC.					DR: <i>Rocky</i> 2015/03/18	DWG NO.: ASI-1100AAEP
					CHKD: <i>Rocky</i> 2015/03/18	SCALE SHEET
					APPD:	1:1 1/1 A
						CUSTOMER DRAWING