





RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.


DIMENSIONS

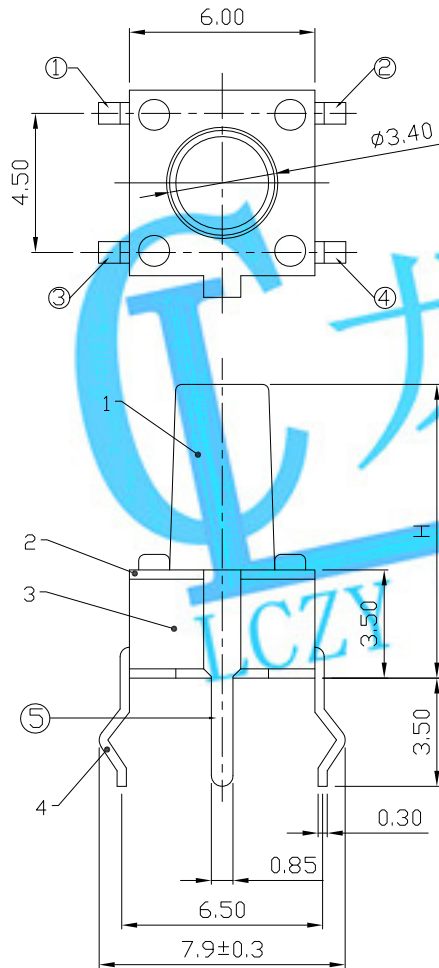

CIRCUIT DIAGRAM



P.C.B MOUNTING PATTERN DIMENSION

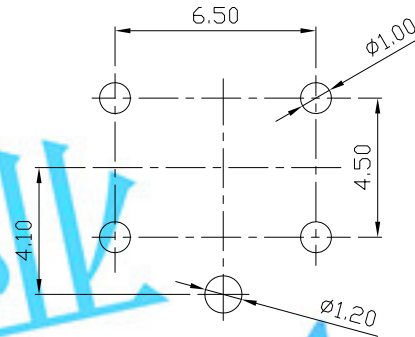

MODEL CODE

AT-1102P-		H
-	4.3	
A	5.0	
B	7.0	
E	7.3	
C	8.0	
D	9.5	
F	12.5	

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

Rating	DC 12V 50mA	
Contact Resistance	100mΩ Max.	
Travel	0.25±0.1mm	
Operating Force	100/130/160/190±50gf	250/320±100gf
Operating Life(cycles)	100,000	

5	CONTACT	PBS C5210R/SUS	1	Ag CALD	WITHIN 1.5mm:±0.1mm	UNITS mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED					
4	TERMINAL	BRASS STRIP	4	Ag PLATED	OVER 1.5mm:±0.2mm	MAT'L						
3	CASE	NYLON+F.G/PBT	1	BLACK		SEE NOTE	TITLE: TACT SWITCH		PART NO.: AT-1102P SERIES			
2	COVER	MILD STEEL	1	Ni PLATED		FINISH	DR: Ricky 2017/08/01		DWG NO.: AZJ-1102P			
1	KNOB	NYLON+F.G/PBT	1	BLACK	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.	SEE NOTE	CHKD: Ricky 2017/08/01					
NO.	PARTS	MATERIAL	Q'TY	FINISHING		Q'TY	APPD:		SCALE	SHEET	REV.	CUSTOMER DRAWING
									4: 1	1/1	A	