



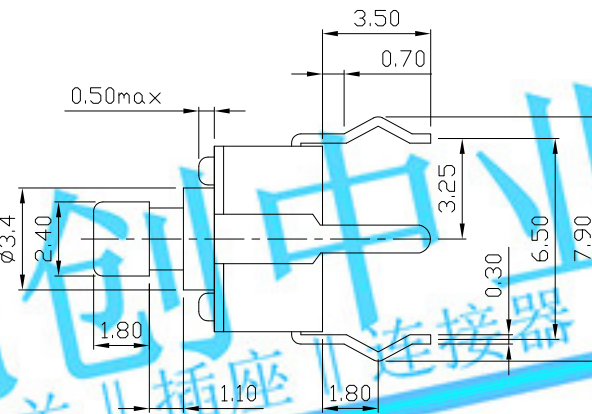


RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.


DIMENSIONS

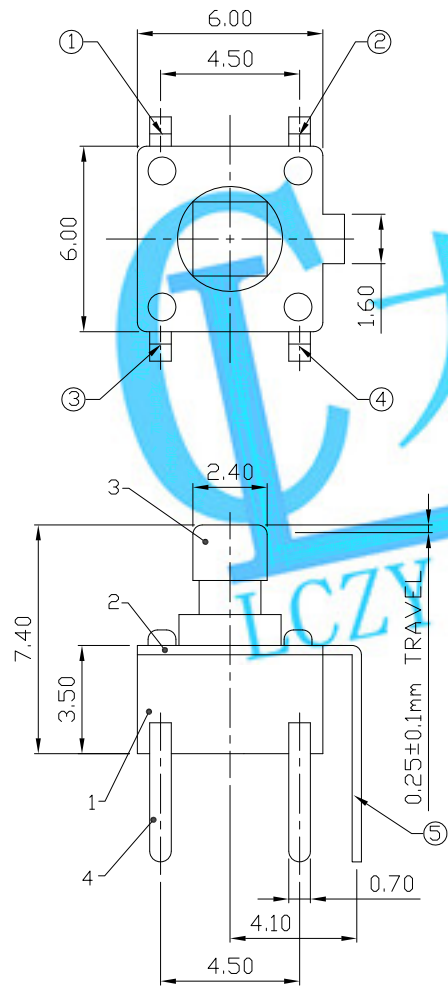

P.C.B MOUNTING PATTERN DIMENSION

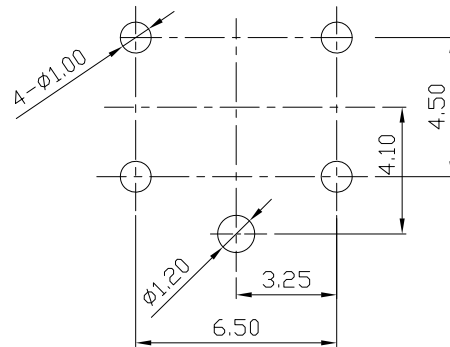

CIRCUIT DIAGRAM



ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

Rating	DC 12V 50mA	
Contact Resistance	100mΩ Max.	
Travel	0.25±0.1mm	
Operating Force	100/130/160±50gf	250±100gf
Operating Life(cycles)	100,000	

5	CONTACT	PBS	1	Ag CALD	WITHIN 1.5mm:±0.1mm	UNITS mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED				
4	TERMINAL	BRASS STRIP	4	Ag PLATED	OVER 1.5mm:±0.2mm	MAT'L					
3	KNOB	NYION + F.G	1	BLACK		SEE NOTE	TITLE:	PART NO.:			
2	COVER	STEEL STRIP	1	Ni PLATED		FINISH	TACT SWITCH	AT-1102PT SERIES			
						SEE NOTE	DR:	2017/08/01			
1	CASE	NYION + F.G	1	BLACK	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.	Q'TY	CHKD:	2017/08/01			
NO.	PARTS	MATERIAL	Q'TY	FINISHING			APPD:	SCALE	SHEET	REV.	CUSTOMER
							4: 1	1/1	A	DRAWING	