

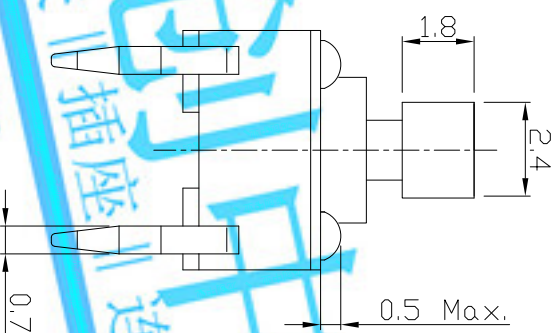


DIMENSIONS

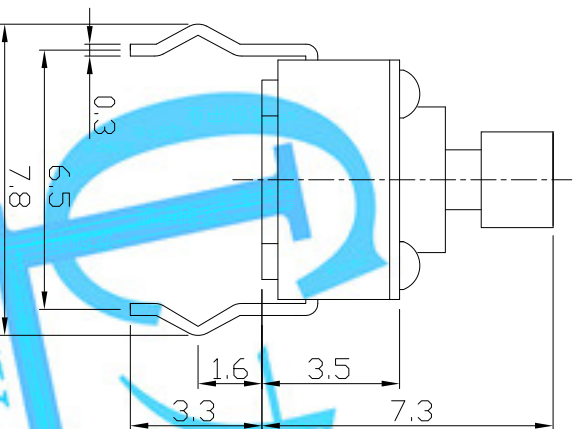



CIRCUIT DIAGRAM

PRODUCT IMAGE

REV.	ECN.	NO.	APPD.

P.C.B MOUNTING PATTERN DIMENSION

The following soldering patterns are recommended for reflow soldering

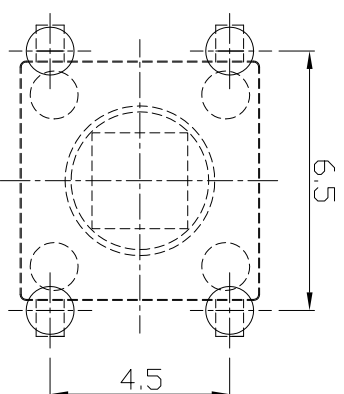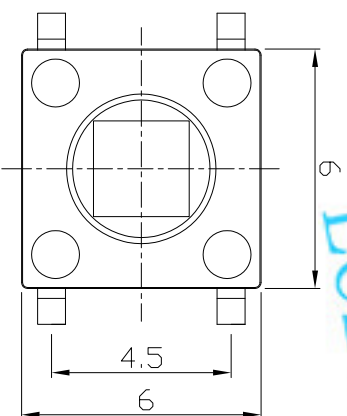

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

Rating	DC 12V 50mA		
Contact Resistance	100m Ω Max.		
Travel	0.25 $\pm$ 0.1mm		
Operating Force	100,130,160 $\pm$ 30gf	250 $\pm$ 50gf	
	100,000	Phosphor Bronze	
Operating Life(cycles)	200,000	Stainless Steel	

X. ± 0.3		X. $\pm 2^{\circ}$	UNITS	LONGCHUANG ZHONGYE (HK)CO.,LIMITED				
MATH			mm					
SEE NOTE				TITLE:		PART NO.:		
FINISH				TACT SWITCH		AT-1102T SERIES		
SEE NOTE				DWG NO.:		ASI-1102T		
DR:				2014/03/25				
CHKD:				2014/03/25				
APPD:				2014/03/25				
Q'TY				SCALE		SHEET		REV.
				1:1		1/1		A
						CUSTOMER		DRAWING