




DIMENSIONS

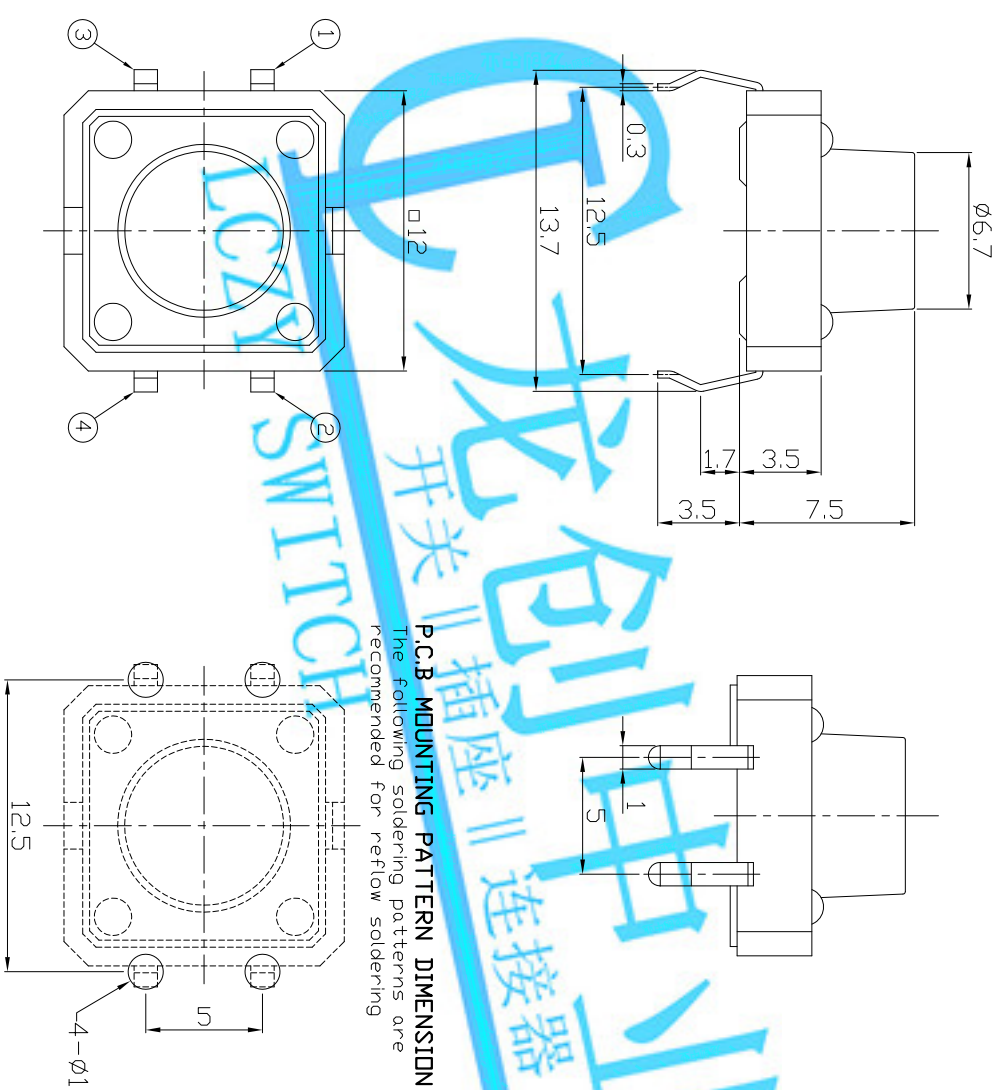

CIRCUIT DIAGRAM



PRODUCT IMAGE

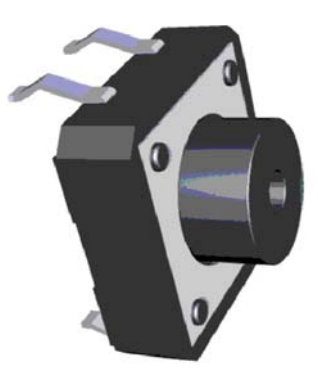

P.C.B MOUNTING PATTERN DIMENSION

The following soldering patterns are recommended for reflow soldering

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

Rating	DC 12V 50mA	
Contact Resistance	100m Ω Max.	
Travel	0.3 $\pm$ 0.1mm	
Operating Force	130,160 $\pm$ 30gf	250 $\pm$ 50gf
Operating Life(cycles)	100,000	

X $\pm$ 0.3		X $\pm$ 2'		UNITS		mm	
MAT'L		SEE NOTE		FINISH		SEE NOTE	
Q'TY		CHKD: <i>Rocky</i> 2014/03/27		APPD: <i>Rocky</i> 2014/03/27		SCALE	
1:1		1/1		A		CUSTOMER DRAWING	

LONGCHUANG ZHONGYE (HK)CO.,LIMITED

TACT SWITCH

AT-1103B SERIES

DR: *Rocky* 2014/03/27

CHKD: *Rocky* 2014/03/27

APPD: *Rocky* 2014/03/27

DWG NO.: ASI-1103B

SCALE

SHEET

REV.

CUSTOMER DRAWING