





RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.


DIMENSIONS

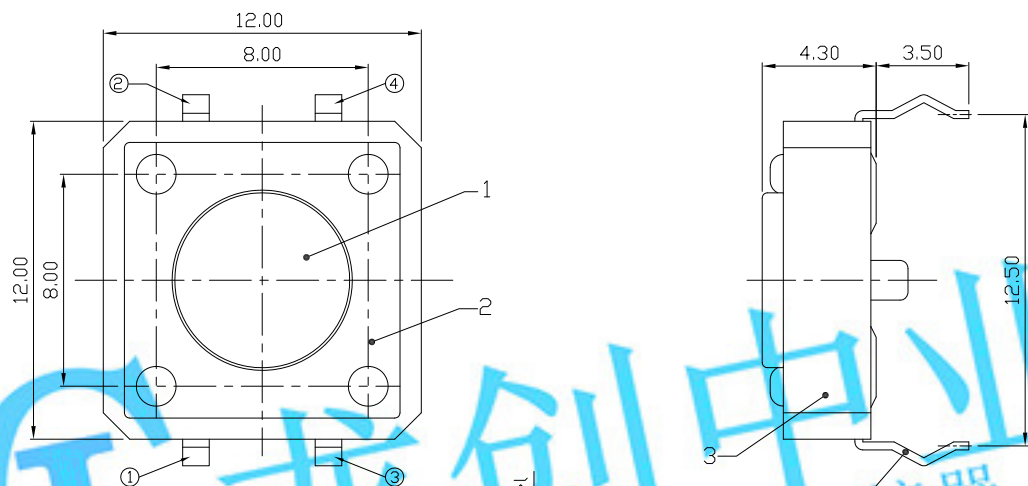

CIRCUIT DIAGRAM



P.C.B MOUNTING PATTERN DIMENSION

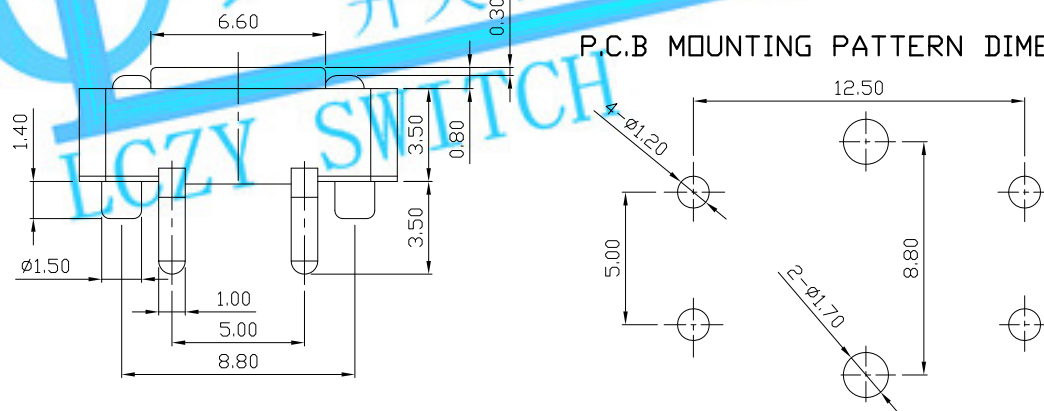

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

Rating	DC 12V 50mA	
Contact Resistance	100mΩ Max.	
Travel	0.30±0.15mm	
Operating Force	160±50gf	250±100gf
Operating Life(cycles)	100,000	

5	SPRING PLATE	PBS	1	Ag CALD	WITHIN 1.5mm:±0.1mm	UNITS mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED								
4	TERMINAL	BRASS STRIP	1	Ag COATING	OVER 1.5mm:±0.2mm	MAT'L									
3	CASE	NYLON+F.G	1	BLACK		SEE NOTE						TITLE: TACT SWITCH	PART NO.: AT-1103E SERIES		
2	COVER	PET	1	NATURAL		FINISH						DR: Ricky 2017/08/02	DWG NO.: AZJ-1103E		
1	KNOB	NYLON+F.G	1	BLACK	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.	SEE NOTE						CHKD: Ricky 2017/08/02			
NO.	PARTS	MATERIAL	Q'TY	FINISHING		Q'TY	APPD:	SCALE 4:1	SHEET 1/1	REV. A	CUSTOMER DRAWING				