



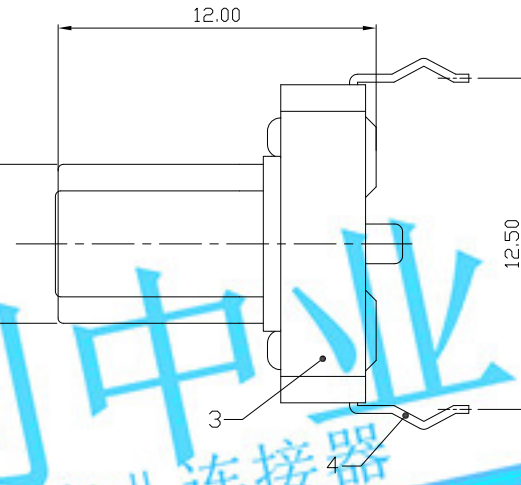


RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.


DIMENSIONS

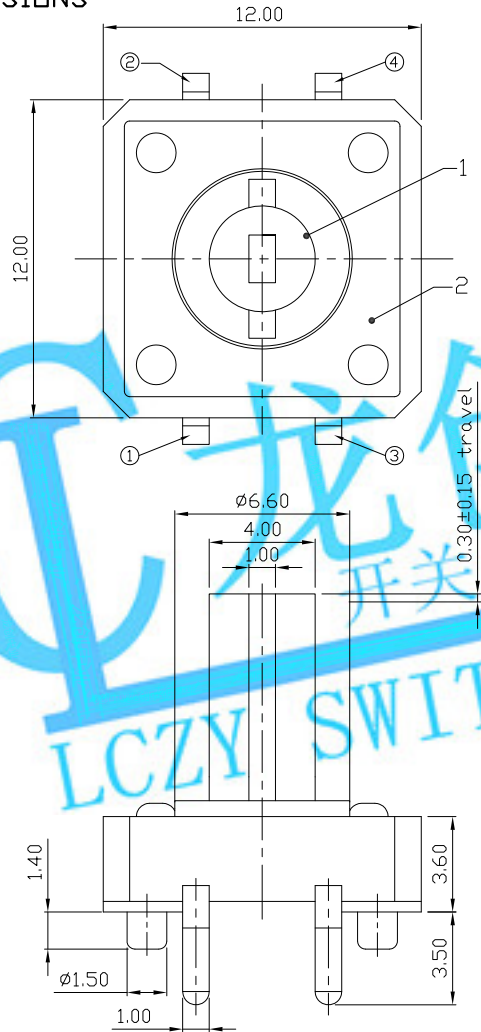

P.C.B MOUNTING PATTERN DIMENSION

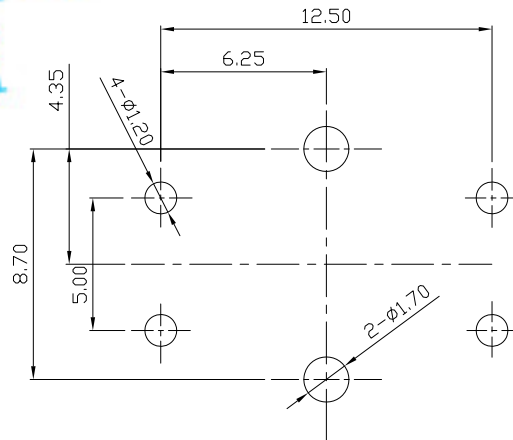

CIRCUIT DIAGRAM



ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

Rating	DC 12V 50mA	
Contact Resistance	100mΩ Max.	
Travel	0.30±0.15mm	
Operating Force	160±50gf	250±100gf
Operating Life(cycles)	100,000	

5	SPRING PLATE	PBS	1	Ag CALD	WITHIN 1.5mm:±0.1mm
4	TERMINAL	BRASS STRIP	1	Ag COATING	OVER 1.5mm:±0.2mm
3	CASE	NYLON+F.G	1	BLACK	
2	COVER	MILD STEEL	1	NI COATING	
1	KNOB	NYLON+F.G	1	NATURAL	
NO.	PARTS	MATERIAL	Q'TY	FINISHING	

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

UNITS	mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
MAT'L	SEE NOTE	TITLE:	PART NO.:		
FINISH	SEE NOTE	TACT SWITCH	AT-1103EA SERIES		
Q'TY	SEE NOTE	DR: Ricky 2017/08/02	DWG NO.:		
		CHKD: Ricky 2017/08/02	AZJ-1103EA		
		APPD:	SCALE	SHEET	REV.
			4:1	1/1	A
			CUSTOMER DRAWING		