



RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

DIMENSIONS


CIRCUIT DIAGRAM

PRODUCT IMAGE


MODEL CODE

AT-1104-

	H	φA
-	4.3	3.5
AS	4.5	3.5
A	5.0	3.5
AL	5.5	3.4
Q	6.0	3.4
QL	6.5	3.4
B	7.0	3.4
E	7.3	3.4
EL	7.5	3.4
C	8.0	3.4
CL	8.5	3.4
DS	9.0	3.4
D	9.5	3.4
DL	10.0	3.0
KS	10.5	3.0
K	11.0	3.0
KL	11.5	3.0
FS	12.0	3.0
F	12.5	3.0
FL	13.0	3.0
G	13.5	3.0
□	14.0	3.0
X	14.5	3.0
Y	15.0	3.0
Z	16.0	3.0
J	16.5	3.0
I	17.0	3.0
T	□2.4X2.4	
TA	□2.8X2.8	


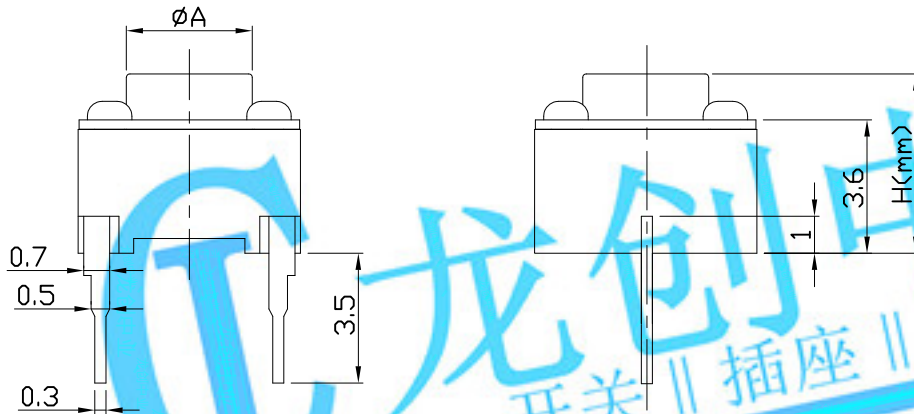


① ②



P.C.B MOUNTING PATTERN DIMENSION

The following soldering patterns are recommended for reflow soldering

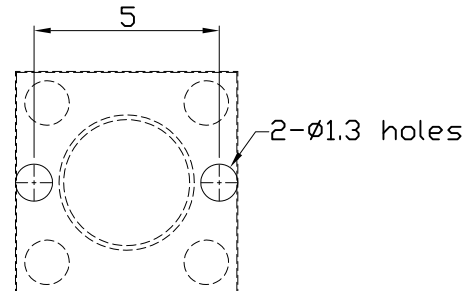

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

Rating	DC 12V 50mA	
Contact Resistance	100mΩ Max.	
Travel	0.25 ± 0.1mm	
Operating Force	100,130,160±30gf	250±50gf
Operating Life(cycles)	100,000	Phosphor Bronze
	200,000	Stainless Steel

.X ±0.3

X. ±2°

UNITS

mm


MAT'L

SEE NOTE

FINISH

SEE NOTE

Q'TY



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

LONGCHUANG ZHONGYE (HK)CO.,LIMITED

TITLE:

TACT SWITCH

PART NO.:

AT-1104 SERIES

DR:

Ricky 2014/03/27

DWG NO.:

ASI-1104

CHKD:

Ricky 2014/03/27

APPD:

SCALE

SHEET

REV.

CUSTOMER

1:1

1/1

A

DRAWING