Pb Process Capable

RoHS Compliant 2002/95/EC

REV.	ECN. NO.	APPD.

DIMENSIONS

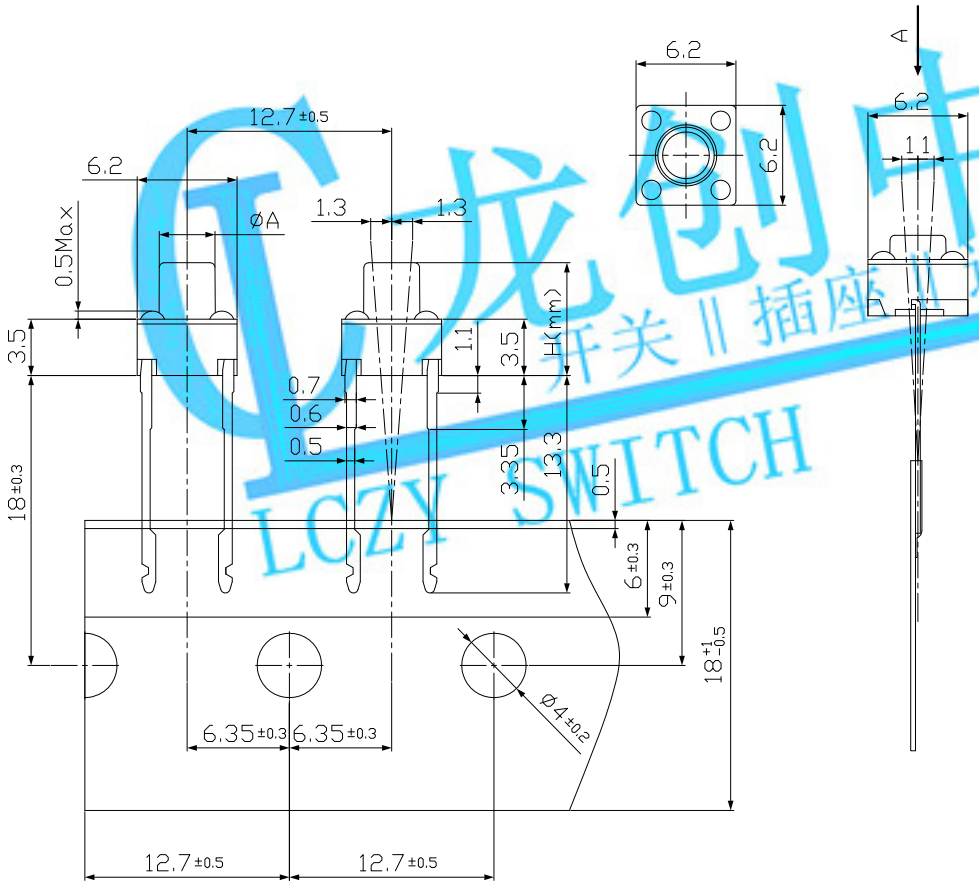

CIRCUIT DIAGRAM

PRODUCT IMAGE

MODEL CODE

AT-1104RT-

	H	ØA
-	4.3	3.4
AS	4.5	3.4
A	5.0	3.4
AL	5.5	3.3
Q	6.0	3.3
QL	6.5	3.3
B	7.0	3.3
E	7.3	3.3
EL	7.5	3.3
C	8.0	3.3
CL	8.5	3.3
DS	9.0	3.3
D	9.5	3.3
DL	10.0	3.0
KS	10.5	3.0
K	11.0	3.0
KL	11.5	3.0
FS	12.0	3.0
F	12.5	3.0
FL	13.0	3.0
G	13.5	3.0
□	14.0	3.0
X	14.5	3.0
Y	15.0	3.0
Z	16.0	3.0
J	16.3	3.0
I	17.0	3.0

PCB HOLE DETAILS



ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

Rating	DC 12V 50mA	
Contact Resistance	100mΩ Max.	
Travel	0.25 ± 0.1mm	
Operating Force	100,130,160±30gf	250±50gf
Operating Life(cycles)	100,000	

龙创中业 开关 | 插座 | 连接器 LCZY SWITCH

.X ±0.3	X. ±2°	UNITS mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED
		MAT'L SEE NOTE	TITLE: TACT SWITCH / PART NO.: AT-1104RT SERIES
		FINISH SEE NOTE	DR: Ricky 2015/03/18 / DWG NO.: ASI-1104RT
		Q'TY	CHKD: Ricky 2015/03/18
			APPD:

SCALE 1:1 | SHEET 1/1 | REV. A | CUSTOMER DRAWING

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.