

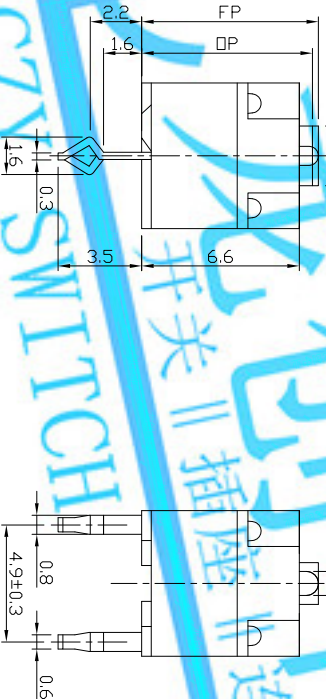


DIMENSIONS



Structure chart

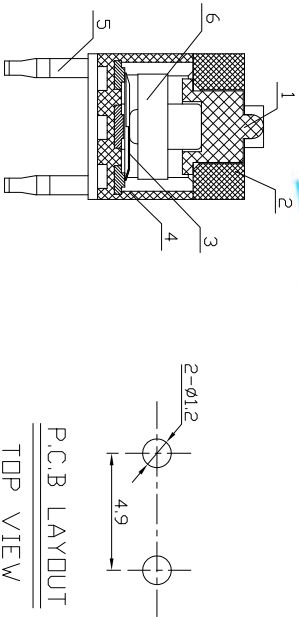

P.C.B LAYOUT
TOP VIEW

CIRCUIT DIAGRAM

Material list

Material list		Tolerance:±0.2		UNITS mm		LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
8						THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE WRITTEN CONSENT OF ACCURATE INNOTECH INC.			
7									
6	Thimble	RUBBER	1		SEE NOTE				
5	Terminal	C2680	2		FINISH				
4	Base	Nylon	1		SEE NOTE				
3	Spring Plate	SUS301	1			DR: <i>Ricky</i> 2017/7/20	DWG NO: AT-2706TJ-70G		
2	Case	Nylon	1			CHKD: <i>Ricky</i> 2017/7/20	ATD-2706TJ-70G		
1	Button	Nylon	1		Q'TY		SCALE	SHEET	REV.
NO.	PARTS	MATERIAL	Q'TY	FINISHING		APPD:	11	1/1	A

1.Functional spec

1.1 Rated Voltage	DC30V
1.2 Rated Current	50mA
1.3 Contact Resistance	≤100mΩ(initial value)
1.4 Operating Force	70±20gf
1.5 Bounce Time	
1.6 Free Position	7.35±0.2mm
1.7 Operating Position	7.0±0.2mm
1.8 Position Travel	
1.9 Return Force	

2.Reliable Rating

2.1 Mechanical Life	1,000,000 CYCLES
2.2 Electrical Life	1,000,000 CYCLES
2.3 Insulation Resistance	≥100MΩ DC250V
2.4 Withstand Voltage	AC600V 1 minute
2.5 Soldering Technic	Hand/Reflow soldering
2.6 Operating Temper	-20°C ~ +70°C
2.7 Ambient Humidity Used	<85%RH