



DIMENSIONS

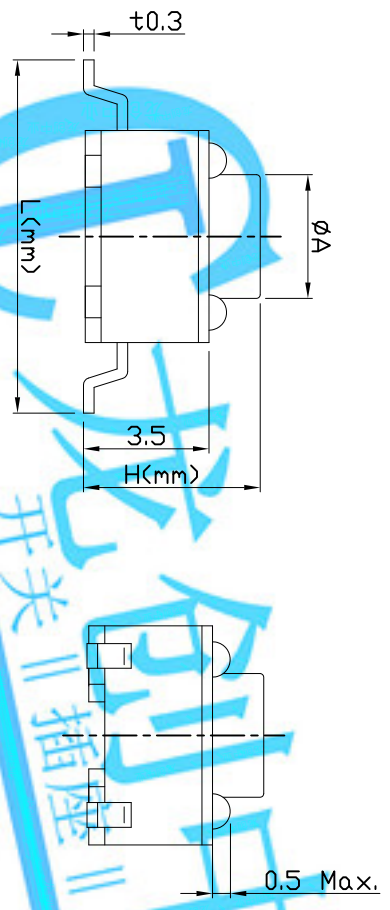

CIRCUIT DIAGRAM

PRODUCT IMAGE


MODEL CODE

AT-1102S-

	H	ØA	L
-	4.3	3.5	9
AS	4.5	3.5	10
A	5.0	3.5	
AL	5.5	3.4	
Q	6.0	3.4	
QL	6.5	3.4	
B	7.0	3.4	
E	7.3	3.4	
EL	7.5	3.4	
C	8.0	3.4	
CL	8.5	3.4	
DS	9.0	3.4	
D	9.5	3.4	
DL	10.0	3.0	
KS	10.5	3.0	
K	11.0	3.0	
KL	11.5	3.0	
FS	12.0	3.0	
F	12.5	3.0	
FL	13.0	3.0	
G	13.5	3.0	
Q	14.0	3.0	
X	14.5	3.0	
Y	15.0	3.0	
Z	16.0	3.0	
J	16.3	3.0	
I	17.0	3.0	
T	2.4X2.4		
TA	2.8X2.8		

P.C.B MOUNTING PATTERN DIMENSION

The following soldering patterns are recommended for reflow soldering

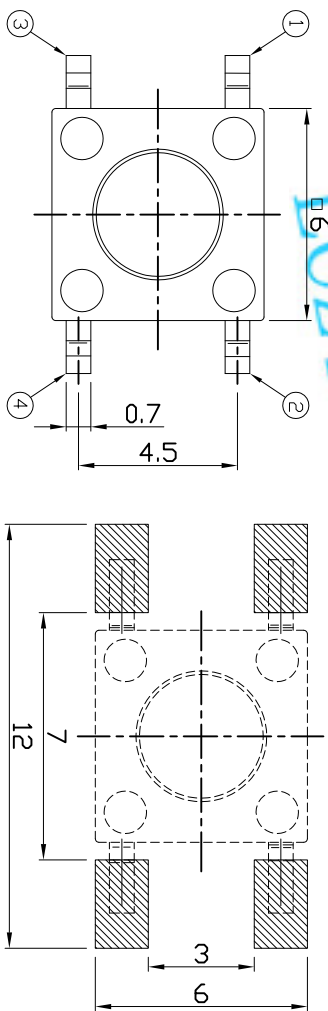

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

Rating	DC 12V 50mA	
Contact Resistance	100mΩ Max.	
Travel	0.25 ± 0.1mm	
Operating Force	100,130,160±30gf	250±50gf
Operating Life(cycles)	100,000	Phosphor Bronze
	200,000	Stainless Steel

.X ±0.3	X. ±2'	UNITS	mm
		MAT'L	SEE NOTE
		FINISH	SEE NOTE
TITLE:		PART NO.:	
TACT SWITCH		AT-1102S SERIES	
DR: Ricky	2014/03/25	DWG NO.:	ASI-1102S
CHKD: Ricky	2014/03/25	SCALE	SHEET
APPD:		1/1	REV. A
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE WRITTEN CONSENT OF ACCURATE INNOTECH INC.		CUSTOMER DRAWING	

LONGCHUANG ZHONGYE (HK)CO.,LIMITED