

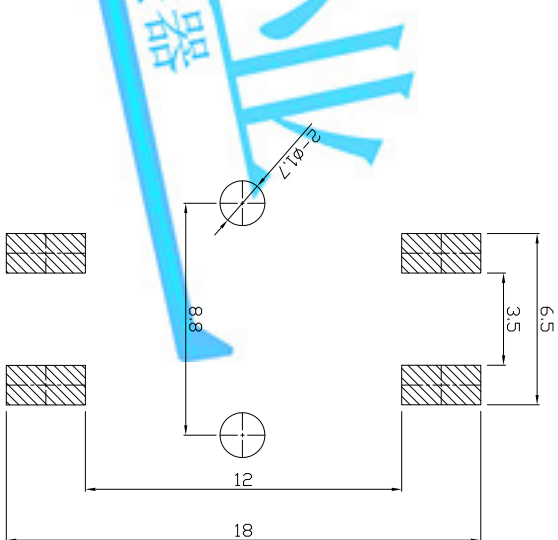


DIMENSIONS

P.C.B MOUNTING PATTERN DIMENSION

REV.	ECN.	NO.	APPD.

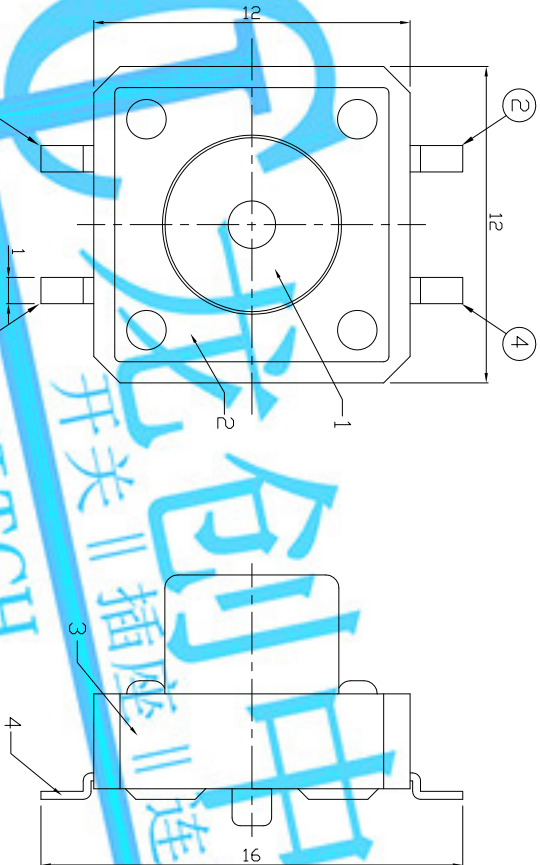

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

Rating	DC 12V 50mA	
Contact Resistance	100mΩ Max.	
Travel	0.3±0.15mm	
Operating Force	160±50gf	250±100gf
Operating Life(cycles)	100,000	

5	SPRING PLATE	PBS	1	Ag CLAD	WITHIN 1.5mm ±0.1	UNITS	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
4	TERMINAL	BRASS STRIP	4	Ag COATING	OVER 1.5mm ±0.2	MAT'L				
3	CASE	NYLON+P.G	1	BLACK		SEE NOTE				
2	COVER	MILD STEEL	1	Ni COATING		FINISH				
1	KNDB	NYLON+P.G	1	BLACK		Q'TY	DR: Ricky 2017/09/21	DWG NO.: AZJ-1103SE-8.5	SCALE	REV.
ND.	PART NAME	MATERIAL	QTY.	FINISHING	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS WITHOUT WRITTEN CONSENT OF ACCURATE INNOTECH INC.		CHKD: Ricky 2017/09/21	APPD:	4:1	1/1
									A	CUSTOMER DRAWING