




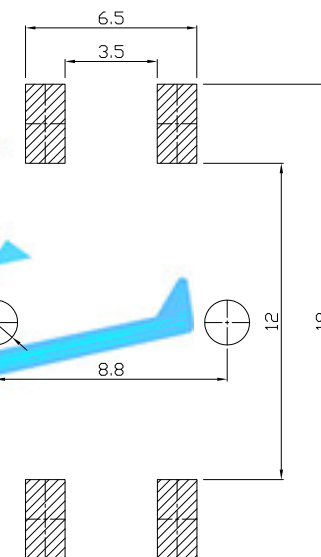


REV.	ECN.	NO.	APPD.

P.C.B MOUNTING PATTERN DIMENSION

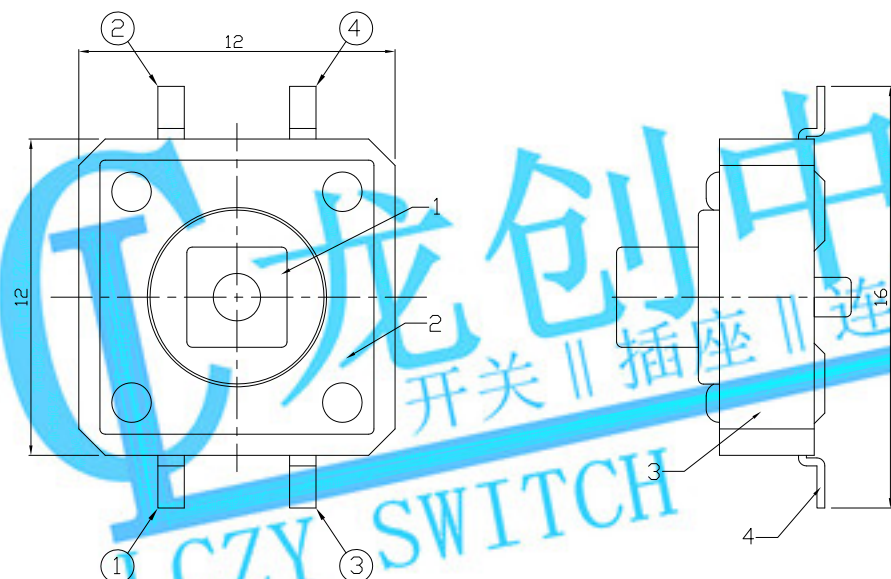

CIRCUIT DIAGRAM

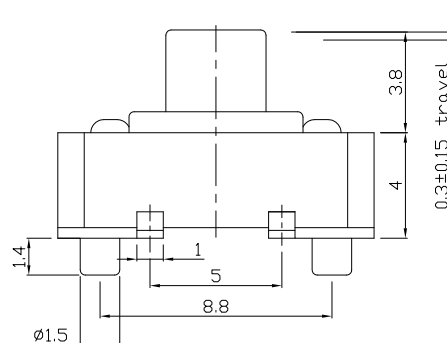

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

Rating	DC 12V 50mA	
Contact Resistance	100m Ω Max.	
Travel	0.3±0.15mm	
Operating Force	160±50gf	250±100gf
Operating Life(cycles)	100,000	

5	SPRING PLATE	PBS	1	Ag CLAD	WITHIN 1.5mm ± 0.1	UNITS mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED				
4	TERMINAL	BRASS STRIP	4	Ag COATING	OVER 1.5mm ± 0.2	MAT'L					
3	CASE	NYLON+F.G	1	BLACK		SEE NOTE	TITLE:	PART NO.:			
2	COVER	MILD STEEL	1	Ni COATING		FINISH	TACT SWITCH	AT-1103SEC SERIES			
1	KNOB	NYLON+F.G	1	BLACK	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.	SEE NOTE	DR: <i>Ricky</i> 2017/09/20	DWG NO.:			
NO.	PART NAME	MATERIAL	QTY.	FINISHING		Q'TY	CHKD: <i>Ricky</i> 2017/09/20	AZJ-1103SEC			
							APPD:	SCALE: 4:1	SHEET: 1/1	REV: A	CUSTOMER DRAWING