



DIMENSIONS



P.C.B MOUNTING PATTERN DIMENSION

CIRCUIT DIAGRAM

MODEL CODE

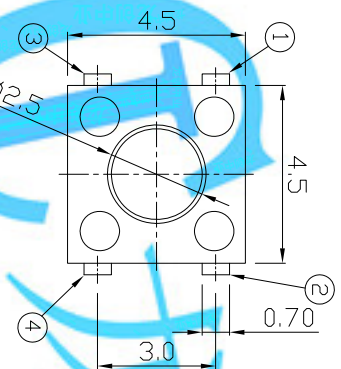

	H
-	3.8
C	5.0

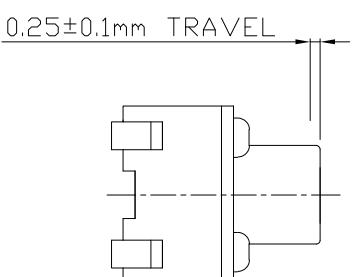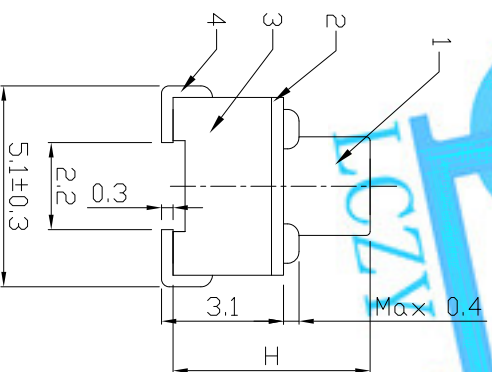

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

Rating	DC 12V 50mA	
Contact Resistance	100mΩ Max.	
Travel	0.25±0.1mm	
Operating Force	160±50gf	250±100gf
Operating Life(cycles)	100,000	

5	CONTACT	PBS/SUS	1	Ag CLAD	WITHIN 1.5mm ±0.1 OVER 1.5mm ±0.2	UNITS	LONGCHUANG ZHONGYE (HK)CO.,LIMITED					
4	TERMINAL	BRASS STRIP	4	Ag PLATED		MAT'L		mm				
3	CASE	NYLON	1	BLACK	SEE NOTE	SEE NOTE						
2	COVER	MILD STEEL	1	NI PLATED	FINISH	PART NO.: AT-1109U SERIES						
1	KNDB	NYLON	1	WHITE/BLACK	SEE NOTE	DWG NO.: AZJ-1109U						
NO.	PART NAME	MATERIAL	QTY.	FINISHING	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF LONGCHUANG ZHONGYE (HK)CO.,LIMITED AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INDUSTECH INC.		DR: Stucky 2017/09/19	APPD: Stucky 2017/09/19	SCALE	SHEET	REV.	CUSTOMER DRAWING
									5:1	1/1	A	