




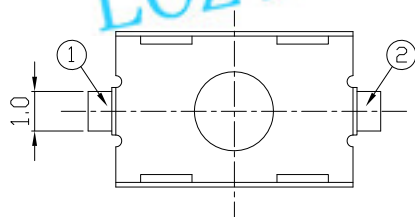


RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.


DIMENSIONS

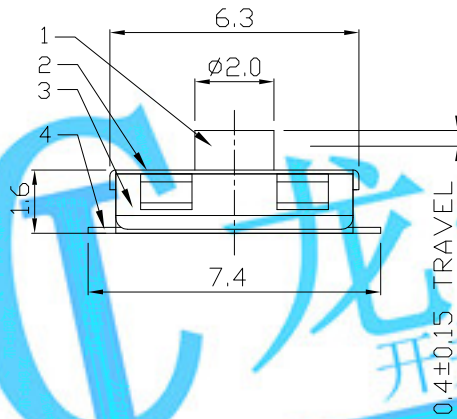

P.C.B MOUNTING PATTERN DIMENSION

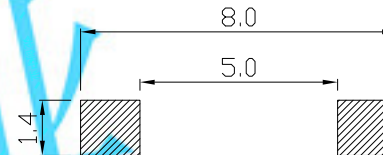


CIRCUIT DIAGRAM



ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

Rating	DC 12V 50mA	
Contact Resistance	100mΩ Max.	
Travel	0.4±0.15mm	
Operating Force	180±50gf	250±100gf
Operating Life(cycles)	50,000	

5	CONTACT	SUS	1	NATURAL	WITHIN 1.5mm ±0.1	UNITS mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED					
4	TERMINAL	BRASS STRIP	2	Ag PLATED	OVER 1.5mm ±0.2							
3	CASE	NYLON+F.G	1	BLACK		SEE NOTE	TITLE: TACT SWITCH		PART NO.: AT-1111 SERIES			
2	COVER	SUS	1	WASHING		FINISH SEE NOTE	DR: <i>Ricky</i> 2017/09/22		DWG NO.: AZJ-1111			
1	KNOB	RUBBER	1	BLACK	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.	Q'TY	CHKD: <i>Ricky</i> 2017/09/22					
NO.	PART NAME	MATERIAL	QTY.	FINISHING			APPD:		SCALE 4:1	SHEET 1/1	REV. A	CUSTOMER DRAWING