




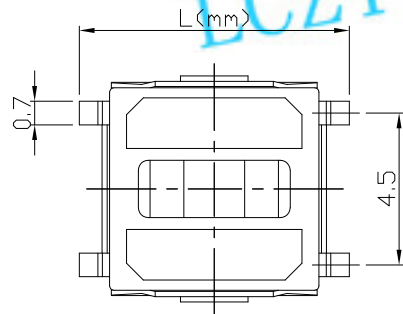


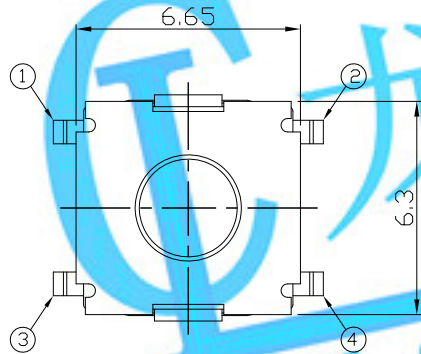

RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.


DIMENSIONS

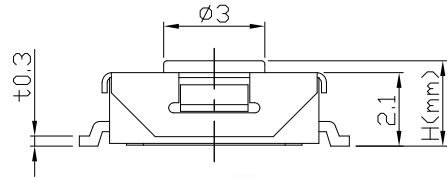

Knob Length

AT-1157			ND
	L		H
A	8	S	2.5
B	10	B	2.7
		H	3.1
		Q	3.4

P.C.B MOUNTING PATTERN DIMENSION
The following soldering patterns are recommended for reflow soldering

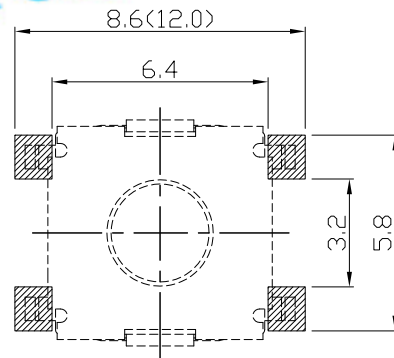

ELECTRO-MECHANICAL CHARACTERISTICS
Refer to additional specifications

Rating	DC 12V 50mA	
Contact Resistance	100mΩ Max.	
Travel	0.25 ± 0.1mm	
Operating Force	100,130,160±30gf	250±50gf
Operating Life(cycles)	100,000	Phosphor Bronze
	200,000	Stainless Steel

.X ±0.3	X. ±2°	UNITS mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
		MAT'L SEE NOTE				
		FINISH SEE NOTE	TITLE: TACT SWITCH		PART NO.: AT-1157XXND SERIES	
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.		Q'TY	DR: <i>Ricky</i> 2014/03/28		DWG NO.: ASI-1157XXND	
			CHKD: <i>Ricky</i> 2014/03/28			
			APPD:			
			SCALE	SHEET	REV.	CUSTOMER
			1:1	1/1	A	DRAWING