

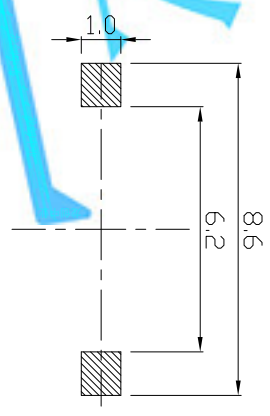



DIMENSIONS

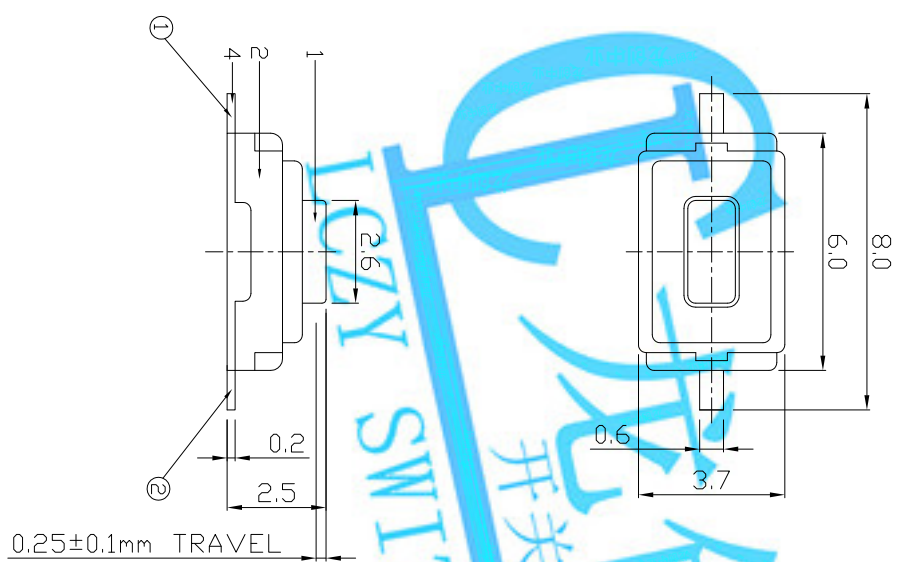

P.C.B MOUNTING PATTERN DIMENSION CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

Rating	DC 12V 50mA	
Contact Resistance	100mΩ Max.	
Travel	0.25±0.1mm	
Operating Force	180±50gf	250±100gf
	Operating Life(cycles)	
		30,000

6	SEAL PLATE	PET	1	YELLOW	WITHIN 1.5mm ±0.1 OVER 1.5mm ±0.2	UNITS mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
5	CONTACT	SUS	1	Ag CLAD		MAT'L SEE NOTE				
4	TERMINAL	BRASS STRIP	2	Ag COATING		FINISH SEE NOTE				
3	CASE	PA6T	1	WHITE/BLACK			TITLE: TACT SWITCH	PART NO.:	AT-1181F SERIES	
2	COVER	MILD STEEL	1	Ni PLATED	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE WRITTEN CONSENT OF ACCURATE INNOTECH INC.		DR: <i>Rocky</i> 2017/09/21	DWG NO.:	AZ-J-1181F	
1	KNDB	PPA	1	RED/BLACK		Q'TY	CHKD: <i>Rocky</i> 2017/09/21	SCALE	SHEET	REV.
ND.	PART NAME	MATERIAL	QTY.	FINISHING			APPD:	8:1	1/1	A
			1							CUSTOMER DRAWING