

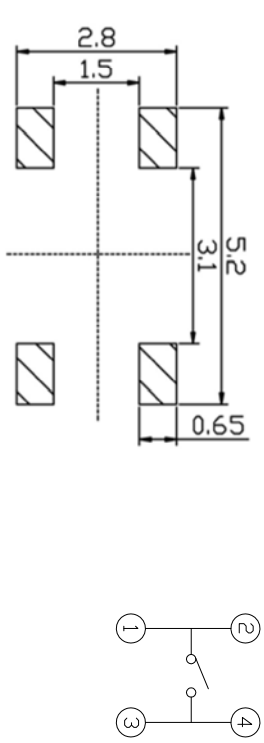


DIMENSIONS

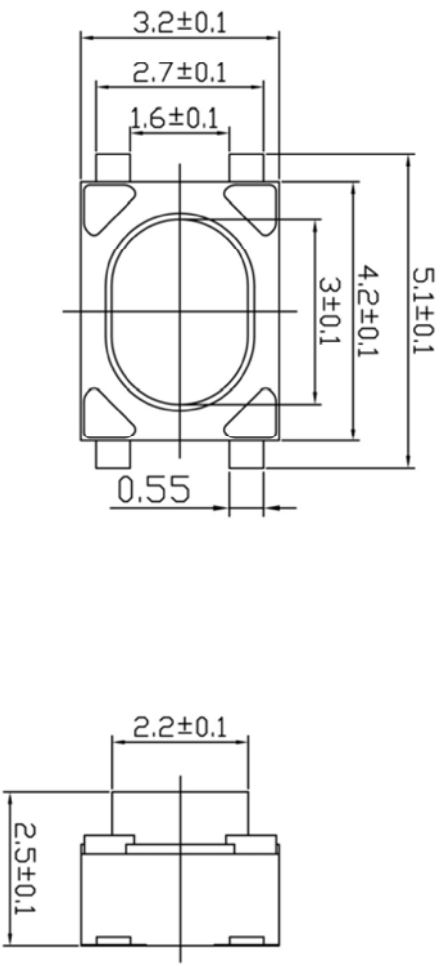

P.C.B MOUNTING PATTERN DIMENSION CIRCUIT DIAGRAM

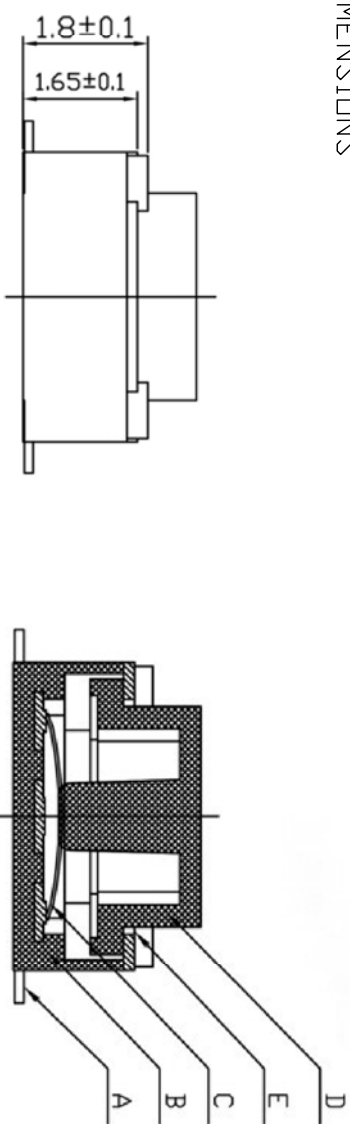

The following soldering patterns are recommended for reflow soldering

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

Rating	DC 12V 50mA		
Contact Resistance	100mΩ Max.		
Travel	0.15 ± 0.1mm		
Operating Force	160±50gf	250±50gf	400±50gf
Operating Lifecycles)	50,000		

Bill of materials:

E	COVER	STAINLESS STEEL T=0.15mm	1	WASHING	X ±0.3	X. ±2"	UNITS	LONGCHUANG ZHONGYE (HK)CO.,LIMITED									
D	KNOB	LCP	1	WHITE			MAT'L										
C	CONTACT	STAINLESS STEEL	2	AG PLATED			SEE NOTE										
B	CASE	LCP	1	WHITE			FINISH										
A	TERMINAL	PHOSPHOR BRONZE T=0.12mm	1	NI/AG PLATED			SEE NOTE										
ND.	PARTS	MATERIAL	Q'TY	FINISHING	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR IN ANY MANNER DISSEMINATED WITHOUT THE WRITTEN CONSENT OF ACCURATE INNOTECH INC.					DR: <i>Jacky</i> 2018/06/11	DWG NO.: AKS-1182F	TITLE: TACT SWITCH			PART NO.: AT-1182F SERIES		
							Q'TY	CHKD: <i>Jacky</i> 2018/06/11	APPD:	SCALE	SHEET	REV.	CUSTOMER DRAWING				
										1:1	1/1	A					