





DIMENSIONS

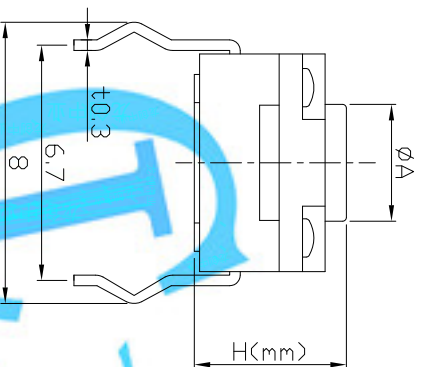

CIRCUIT DIAGRAM

PRODUCT IMAGE



MODEL CODE

AT-1141-

	H	ØA
-	4.3	3.4
A	4.5	3.4
B	4.8	3.4
C	5.0	3.3
D	5.5	3.3
E	6.0	3.3
F	6.5	3.3
G	7.0	3.3
H	7.5	3.4
I	8.0	3.4
J	8.5	3.4
K	9.0	3.3
L	9.5	3.3
M	10.0	3.3
N	10.5	3.3
O	11.0	3.3
P	11.5	3.0
Q	12.0	3.0

P.C.B MOUNTING PATTERN DIMENSION

The following soldering patterns are recommended for reflow soldering

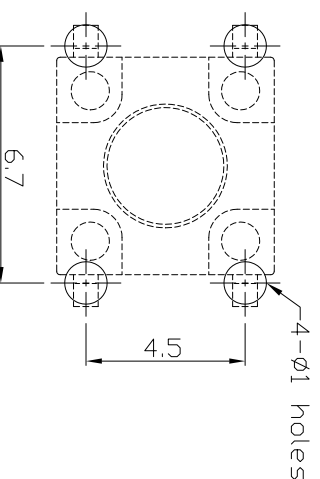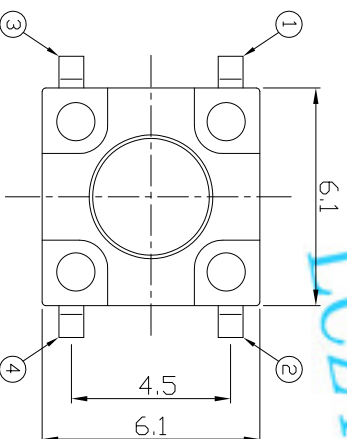

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

Rating	DC 12V 50mA
Contact Resistance	100m Ω Max.
Insulation Resistance	100M Ω (DC 500V / 1 min) Min
Withstanding Voltage	250 VAC / min.
Travel	0.25 $\pm$ 0.1mm
Operating Force	260 $\pm$ 50gf
Operating Life(cycles)	100,000

[illegible]