

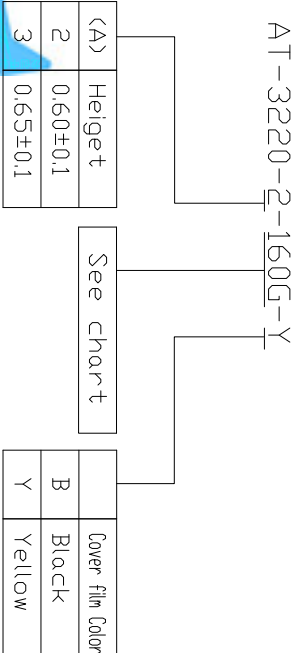
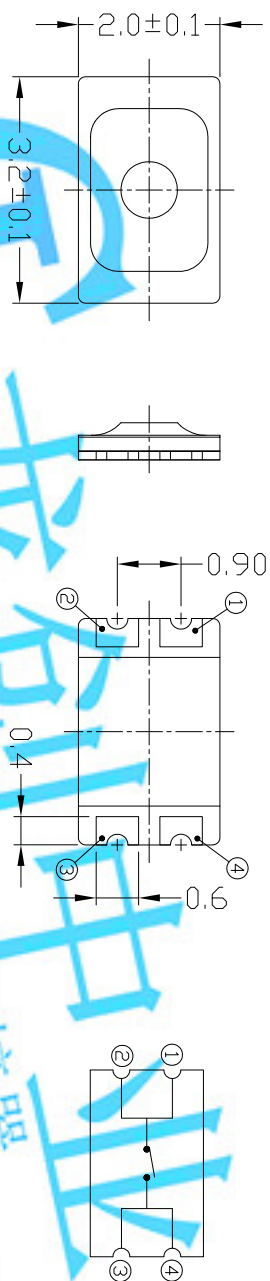


DIMENSIONS

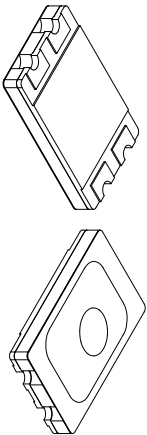


CIRCUIT DIAGRAM MODEL CODE

RECOMMEND LAND PATTERN

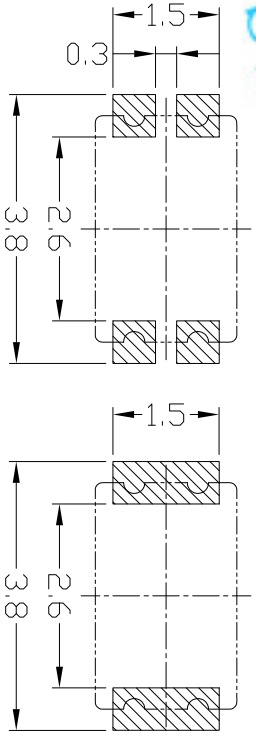

ELECTRO-MECHANICAL CHARACTERISTICS
Refer to additional specifications

Rating	DC 12V 50mA		
Contact Resistance	100mΩ Max.		
Travel	0.13±0.05mm		
Operating Force	160±30gf	180±30gf	
	200±30gf	240±30gf	
Operating Life(cycles)	500,000		

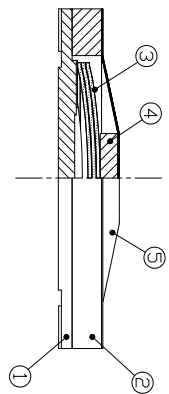

		General		Tolerance	mm (°)	UNITS	mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
		Dimension									
5	Cover film	Polyimide & Epoxy	1					TITLE: SMD DOME SWITCH	PART NO.: AT-3220 SERIES	DWG NO.: AKS-3220	SCALE SHEET REV. 1:1 1/1 A
4	Actuator	Polyimide & Epoxy	1								
3	Metal dome	SUS301	1~3	Ag plating							
2	Guide film	Polyimide & Epoxy	1								
1	PCB	Cu PSR	1	Au+Ni plating							
ND.	PARTS	MATERIAL	Q'TY	FINISHING				DR: Ricky 2019/04/09	CHKD: Ricky 2019/04/09	APPD:	CUSTOMER DRAWING