





REV.	ECN.	NO.	APPD.

1.Functional spec

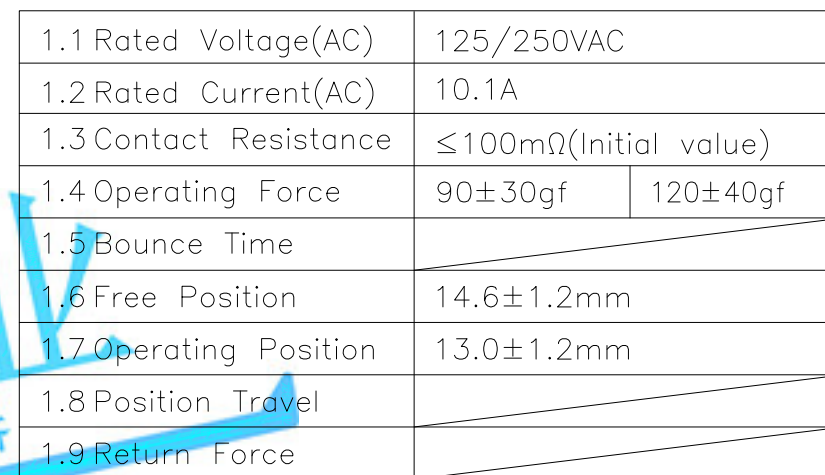

2. Reliable Rating

2.1 Mechanical Life	1,000,000 CYCLES
2.2 Electrical Life	6,000 CYCLES
2.3 Insulation Resistance	≥100MΩ DC500V(Initial value)
2.4 Withstand Voltage	AC1000V 1 minute(Initial value)
2.5 Soldering Technic	Hand Soldering
2.6 Operating Temper	−25°C ~ +85°C
2.7 Ambient Humidity Used	<85%RH



CIRCUIT DIAGRAM

MODEL CODE

SW 10-05 X-XX

1 2 3 4 5

- 1.Series : SW
- 2.Current Rating : 10=10A 125/250VAC
- 3.Actuator : 00=Non-lever 01-99=Lever
- 4.Termination : see chart (N/P/A)
(7=SPST-NO / 3=SPST-NC)
- 5.Operating Force : see chart

Tolerance:±0.2		UNITS mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED									
		MAT'L	TITLE: MICRO SWITCH SM10 SERIES				PART NO.: SM10-05N-XX					
		SEE NOTE										
		FINISH	DR: <i>Ricky</i> 2017/4/7				DWG NO.: ATD-05X-XX					
		SEE NOTE										
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.		Q'TY	CHKD: <i>Ricky</i> 2017/4/7				SCALE			SHEET	REV.	CUSTOMER DRAWING
				APPD:				1:1	1/2	A		
												

