


DIMENSIONS

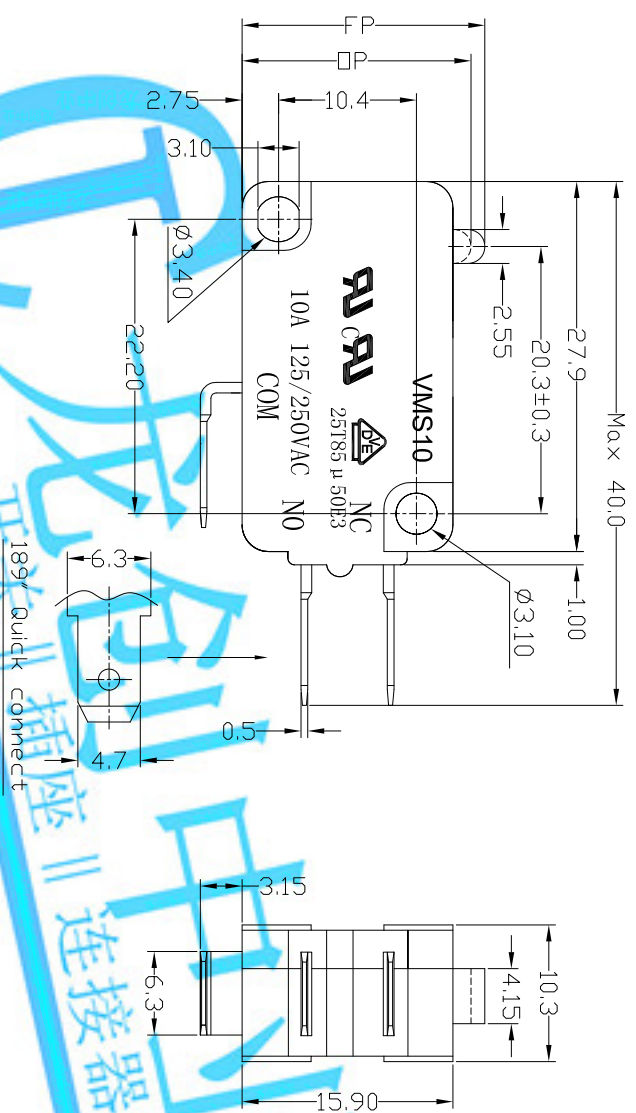

MODEL CODE

VMS10-00X-XX-V10

- 1.Series : VMS
- 2.Current Rating : 10=10A 125/250VAC
- 3.Actuator : 00=Non-lever 01-99=Lever
- 4.Termination : see chart (N/K/J/L/W/A)
- 5.Operating Force : see chart
- 6.Contact type: V10=10Amps Contact

CIRCUIT DIAGRAM

1.Functional spec

1.1 Rated Voltage(AC)	125/250VAC
1.2 Rated Current(AC)	10A
1.3 Contact Resistance	$\leq 100m\Omega$ (Initial value)
1.4 Operating Force	160 $\pm$ 40gf250 $\pm$ 50gf
1.5 Bounce Time	
1.6 Free Position	18.4 $\pm$ 0.5mm
1.7 Operating Position	17.5 $\pm$ 0.5mm
1.8 Position Travel	
1.9 Return Force	

2.Reliable Rating

2.1 Mechanical Life	1,000,000 CYCLES
2.2 Electrical Life	10,000 CYCLES
2.3 Insulation Resistance	$\geq 100M\Omega$ DC500V
2.4 Withstand Voltage	AC1500V 1 minute
2.5 Soldering Technic	Hand Soldering
2.6 Operating Temper	-25°C ~ +85°C
2.7 Ambient Humidity Used	<85%RH

Tolerance: ± 0.2	UNITS mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
	MAT'L	TITLE:	PART NO.:		
	SEE NOTE	MICRO SWITCH VMS10 SERIES	VMS10-00N-XX-V10		
	FINISH	DR: Ricky 2017/6/6	DWG NO: ATD-00X-XX-V10		
	SEE NOTE	CHKD: Ricky 2017/6/6	SCALE SHEET 1/2	REV. A	CUSTOMER DRAWING
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE WRITTEN CONSENT OF ACCURATE INNOTECH INC.					