


DIMENSIONS

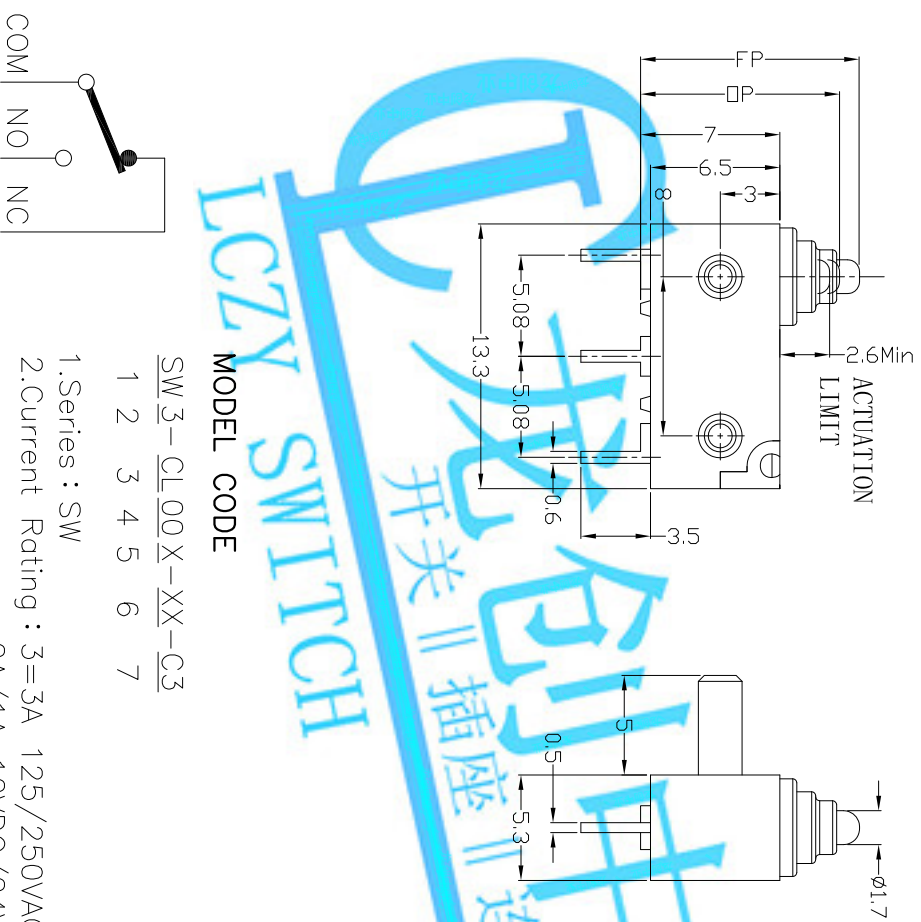

LCZY SWITCH

MODEL CODE

SW 3-CL 00 X-XX-C3

1 2 3 4 5 6 7

1.Series : SW

2.Current Rating : 3=3A 125/250VAC ;
2A/1A 12VDC/24VDC

3.Case type : CL


4.Actuator : 00=Non-lever 01-99=Lever

5.Termination : see chart (P/N/B)

6.Operating Force : see chart

7.Contact type : C3=3Amps Contact

CIRCUIT DIAGRAM



1.Functional spec

1.1 Rated Voltage(AC)	125/250VAC
1.2 Rated Current(AC)	3A
1.3 Rated Voltage(DC)	12VDC/24VDC
1.4 Rated Current(DC)	2A/1A
1.5 Contact Resistance	≤100mΩ(initial value)
1.6 Operating Force	70±30gf
1.7 Free Position	11.5mm Max
1.8 Operating Position	10.5±0.3mm

2.Reliable Rating

2.1 Mechanical Life	1,000,000 CYCLES
2.2 Electrical Life	10,000 CYCLES
2.3 Insulation Resistance	≥100MΩ DC500V(initial value)
2.4 Withstand Voltage	AC600V 1 minute(initial value)
2.5 Soldering Technic	Hand Soldering
2.6 Operating Temper	-25°C ~ +85°C
2.7 Ambient Humidity Used	<85%RH

Tolerance:±0.2		UNITS	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
		mm				
		MAT'L				
		SEE NOTE				
		FINISH				
		SEE NOTE				
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE WRITTEN CONSENT OF ACCURATE INNOTECH INC.			DR:	2017/3/22	DWG NO.:	
			CHKD:	2017/3/22	SCALE	SHEET
			APPD:		1/2	REV.
					A	CUSTOMER DRAWING