



RoHS
Compliant
2002/95/EC




REV.	ECN.	NO.	APPD.

DIMENSIONS

CIRCUIT DIAGRAM

PRODUCT IMAGE

MODEL CODE

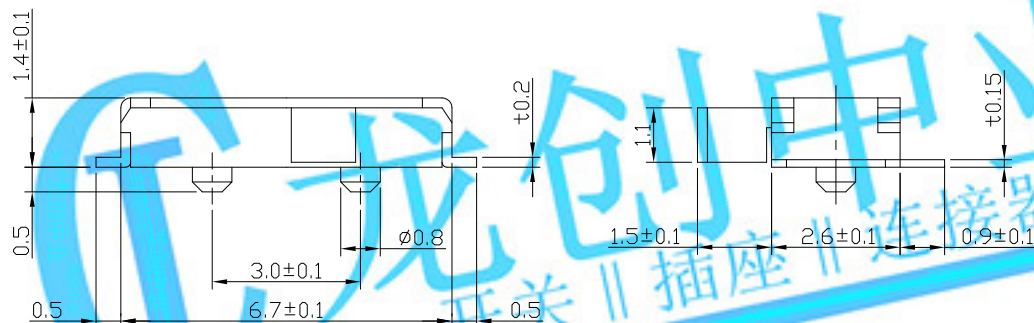



AS-1290AP-W

Knob Color

W	White
B	Black

P.C.B MOUNTING PATTERN DIMENSION

The following soldering patterns are recommended for reflow soldering

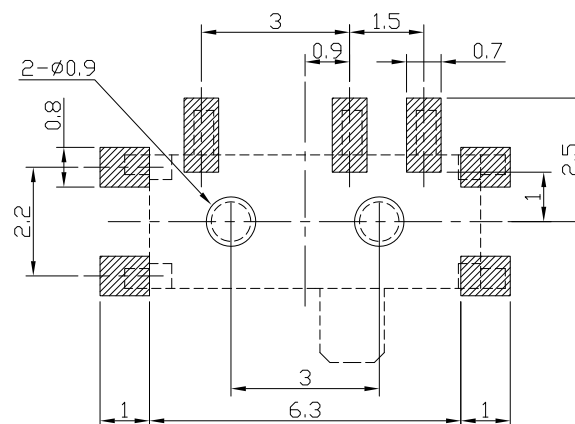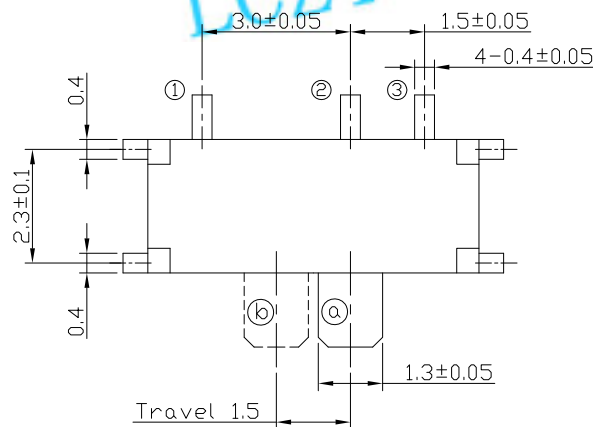

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

Rating	DC 4V 0.3A
Circuit	1C-2P
Contact Resistance	70mΩ Max.
Travel	1.5±0.3mm
Operating Force	150±100gf
Operating Life(cycles)	10,000

.X ±0.2

X. ±2°

UNITS mm

MAT'L

SEE NOTE

FINISH

SEE NOTE

Q'TY

1:1

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

LONGCHUANG ZHONGYE (HK)CO.,LIMITED

TITLE:
MINI SLIDE SWITCH

DR: Ricky 2014/04/03

CHKD: Ricky 2014/04/03

APPD:

PART NO.:
AS-1290AP SERIES

DWG NO.:
ASI-1290AP

SCALE	SHEET	REV.	CUSTOMER
1:1	1/1	A	DRAWING