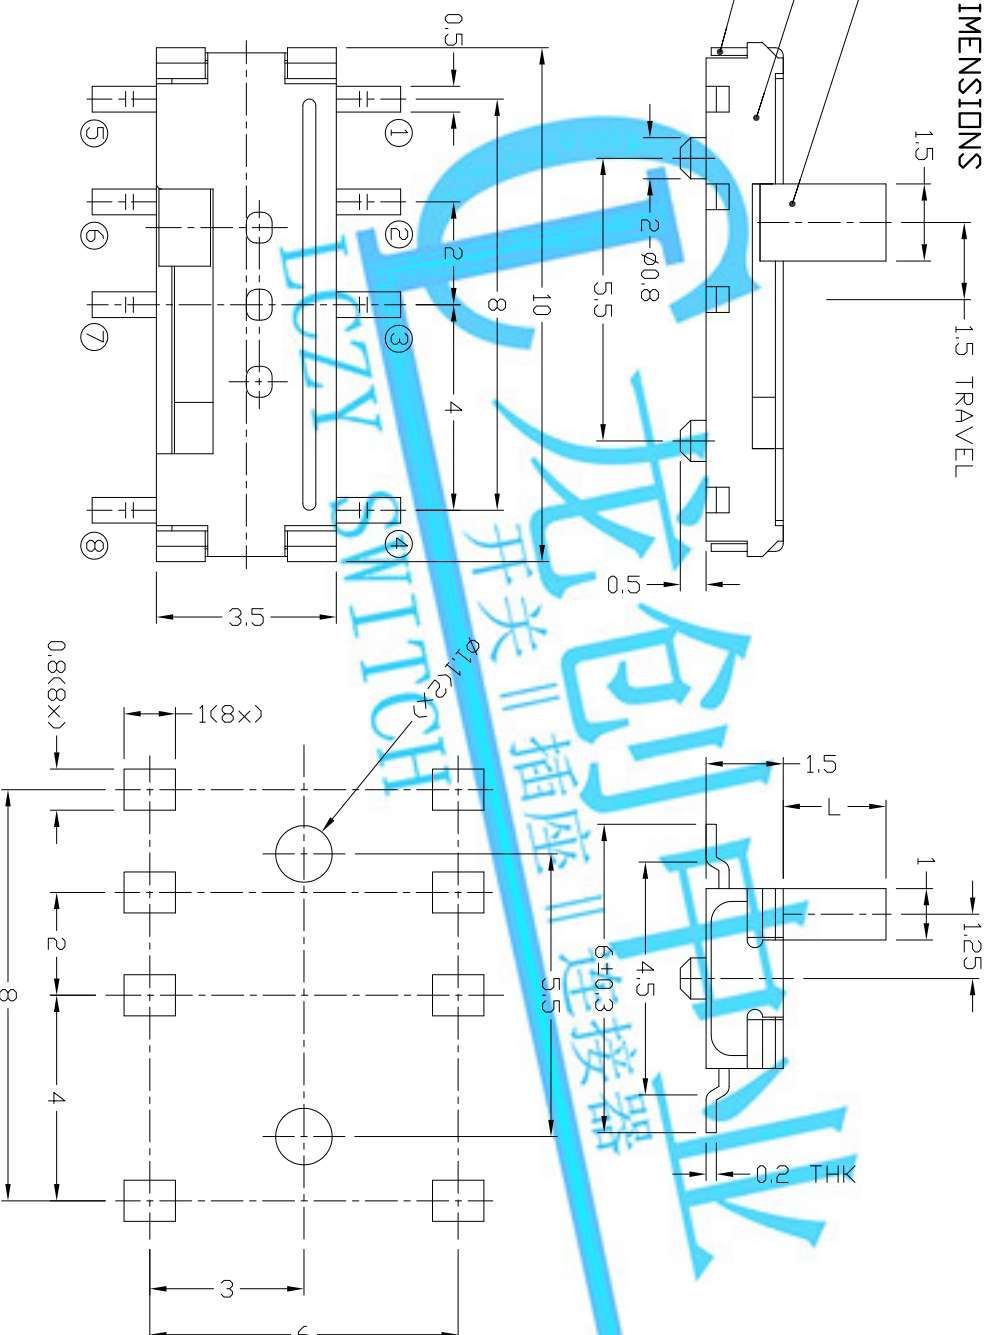


MODEL CODE

AS-1400

L	$\langle m \rangle$
A	1.0
B	2.0
C	1.5

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	DC6V 0.3A
CIRCUIT	2C3P
CONTACT RESISTANCE	70m Ω MAX.
TRAVEL	1.5mm
OPERATING FORCE	200 $\pm$ 60gf
OPERATING LIFE(cycles)	10,000

P.C.B LAYOUT
TOP VIEW

TOP VIEW

8					WITHIN 1.5mm±0.1mm	UNITS mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
7					OVER 1.5mm±0.2mm	MAT'L	TITLE:		PART NO:	
6						SEE NOTE	MINI SLIDE SWITCH / VERTICAL		AS-1400 SERIES	
5	SPRING PLATE	SUS	1	NATURAL			DR: <i>Jacky</i> 2015/04/14		DWG NO: ADL-1400	
4	CONTACT	PBS CS210R-EH	2	AG CLAD		FINISH	CHKD: <i>Jacky</i> 2015/04/14		SCALE SHEET REV. CUSTOMER DRAWING	
3	COVER	SUS	1	NATURAL		SEE NOTE	APPD:		6:1 1/1 A	
2	CASE	PA46/BRASS STRIP	1	BLACK/AG PLATED OVER NI PLATED	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF LONGCHUANG ZHONGYE (HK)CO.,LIMITED AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE WRITTEN CONSENT OF LONGCHUANG ZHONGYE (HK)CO.,LIMITED INC.					
1	KNOB	PA46	1	BLACK	Q'TY					
NO.	PARTS	MATERIAL	Q'TY	FINISHING						