




RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

DIMENSIONS

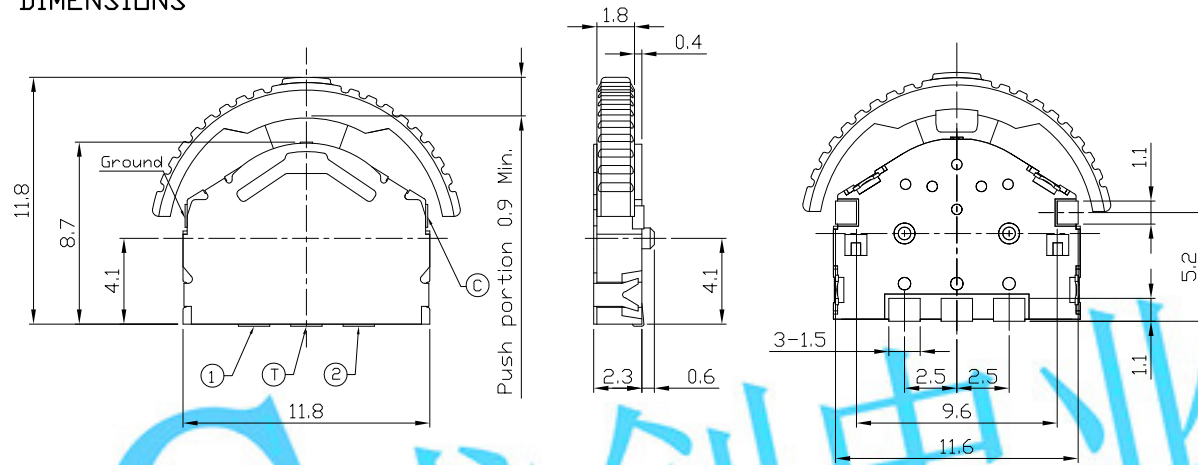


CODE TABLE


CODE TABLE (= ON)

Angle	(25)°	(18)°	0°	(18)°	(25)°
Terminal	①	②	③	④	⑤
CCW	←				→
CW					

PRODUCT IMAGE




CIRCUIT DIAGRAM



P.C.B MOUNTING PATTERN DIMENSION

The following soldering patterns are recommended for reflow soldering

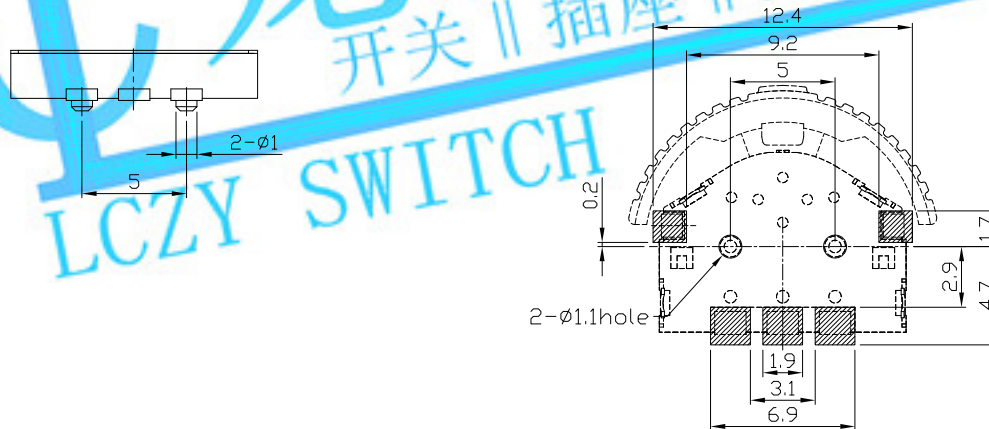

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

Rating	DC 5V 10mA	
Output Voltage	1V Min. at 5V 1mA	
Operating Force	Lever	70±50gf
	Center	200±100gf
Travel	Center	0.9mm Min.
Operating Life(cycles)	100,000	

.X ±0.2

X. ±2°

UNITS

mm

MAT'L

SEE NOTE

FINISH

SEE NOTE

Q'TY

LONGCHUANG ZHONGYE (HK)CO.,LIMITED

TITLE:
PUSH LEVER SWITCH

PART NO.:
AL-1305 SERIES

DR: Ricky 2014/04/02

DWG NO.:
ASI-1305

CHKD: Ricky 2014/04/02

APPD:

SCALE	SHEET	REV.	CUSTOMER
1:1	1/1	A	DRAWING

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.