




RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.



DIMENSIONS

Stillness position
 $2^{\circ}\pm 3^{\circ}$ (A mount of ration Loosening)

An Arrow ($\Rightarrow$) is the
operation direction (4-way)





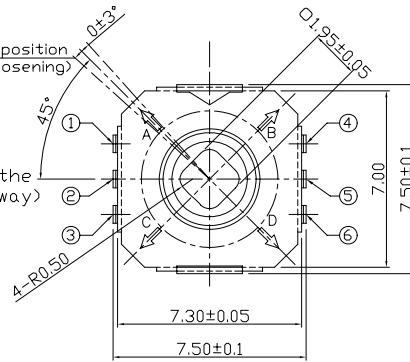


$0^{\circ}\pm 3^{\circ}$ (stillness position)
 $5^{\circ}\pm 3^{\circ}$
(Travel of 4- way Knob)
 $2.0^{\circ}\pm 3^{\circ}$
(A mount of ration loosening)



CIRCUIT DIAGRAM

P.C.B MOUNTING PATTERN DIMENSION

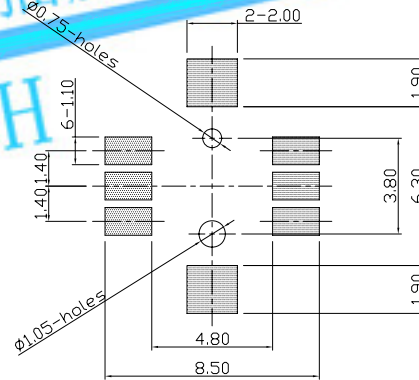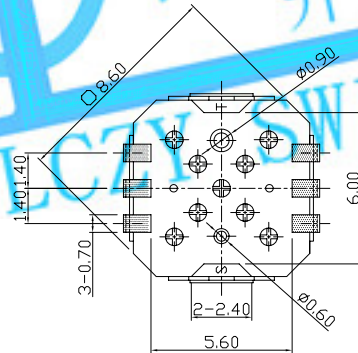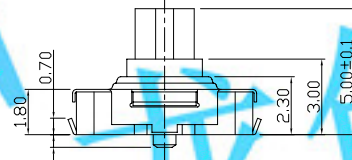

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	DC12V 50mA
CONTACT RESISTANCE	500mΩ MAX.
TRAVEL	(1)4-DIRECTIONAL : 0.25 ±0.1mm (2)CENTER : 0.15 ±0.1mm
OPERATING FORCE	(1)4-DIRECTIONAL : 130 ±50gf (2)CENTER : 240 ±50gf
OPERATING LIFE(cycles)	100,000 CYCLES Min

8					.X ±0.2	X. ±2°	UNITS mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED						
7	TERMINAL	Phosphor Bronze	1				MAT'L							
6	CONTACT	Stainless	1				SEE NOTE	TITLE: 5 DIRECTION TACT SWITCH		PART NO.: AT-1501E SERIES				
5	CONTACT	Stainless	1											
4	STEM A	L.C.P	1				FINISH	DR: Ricky 2015/05/11		DWG NO.: AKS-1501E				
3	STEM B	L.C.P	1				SEE NOTE							
2	COVER	German Silver	1		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.		Q'TY	CHKD: Ricky 2015/05/11		SCALE		SHEET	REV.	CUSTOMER DRAWING
1	CASE	L.C.P	1											
NO.	PARTS	MATERIAL	Q'TY	FINISHING					APPD:		5:1	1/1	A	