

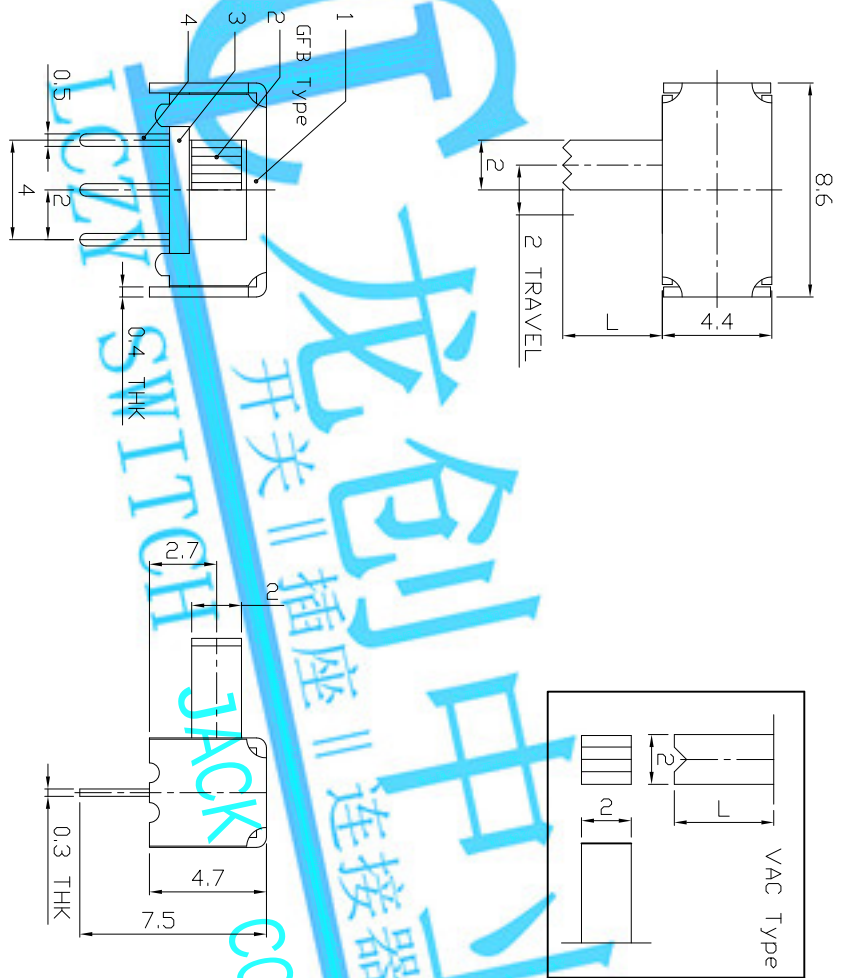



DIMENSIONS



MODEL CODE

SK-12D09-GFB



P.C.B LAYOUT

CIRCUIT DIAGRAM

BOTTOM VIEW

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	1P2T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	2mm
OPERATING FORCE	250±100gf
OPERATING LIFE(cycles)	10,000

8					WITHIN 1.5mm: ±0.1mm	UNITS	mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
7					OVER 1.5mm: ±0.2mm	MAT'L					
6	SPRING PLATE	SUS	1	AG PLATED		SEE NOTE					
5	CONTACT CLIP	PBS STRIP	1	AG PLATED							
4	TERMINAL	BRASS STRIP	3	AG PLATED							
3	BASE	PHENOLIC RESIN	1	NATURAL		FINISH					
2	KNOB	POM	1	BLACK		SEE NOTE					
1	FRAME	STEEL STRIP	1	NI PLATED		Q'TY					
ND.	PARTS	MATERIAL	Q'TY	FINISHING				APPD:			
								TITLE: SLIDE SWITCH / HORIZONTAL PART NO: SK-12D09 DWG NO: ADL-12D09 SCALE: 4:1 SHEET: 1/1 REV. A CUSTOMER DRAWING			
								THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE WRITTEN CONSENT OF ACCURATE INNOTECH INC.			