

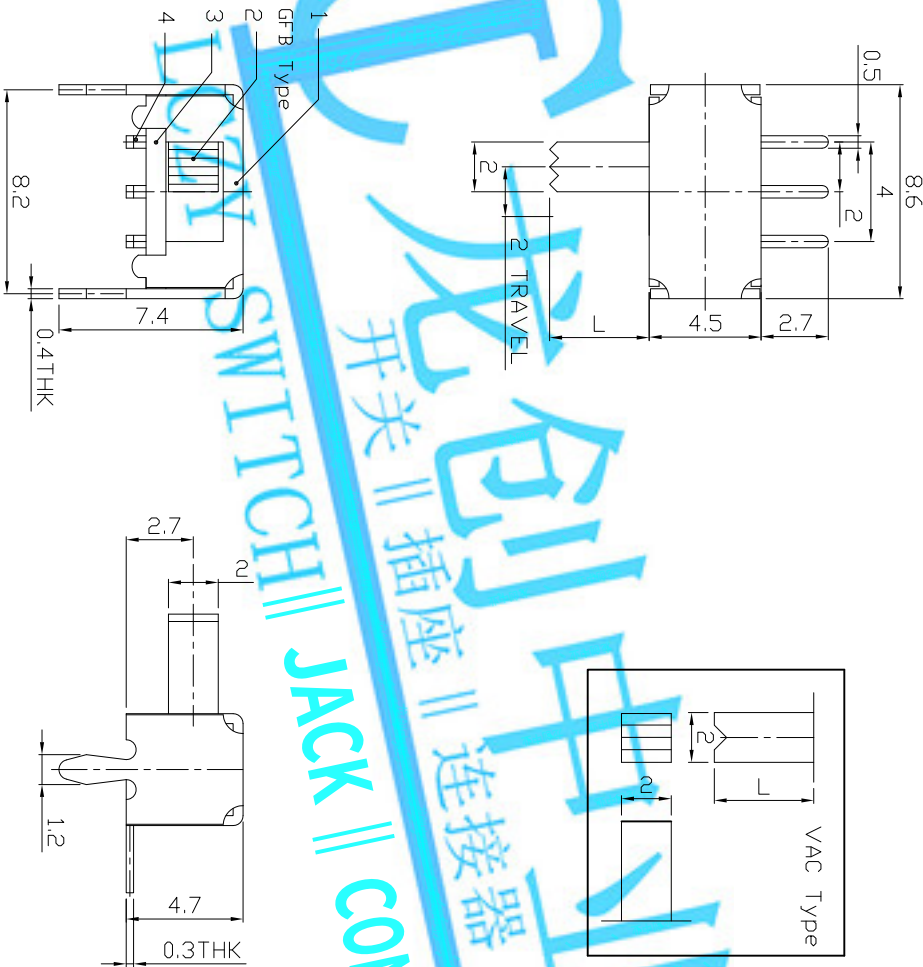



DIMENSIONS



MODEL CODE

SK-12D18-GFB



ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	1P2T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	2mm
OPERATING FORCE	250±100gf
OPERATING LIFE(cycles)	10,000

8				WITHIN 1.5mm: ±0.1mm	UNITS	mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
7				OVER 1.5mm: ±0.2mm	MAT'L	SEE NOTE				
6	SPRING PLATE	SUS	1	AG PLATED						
5	CONTACT CLIP	PBS STRIP	1	AG PLATED						
4	TERMINAL	BRASS STRIP	3	AG PLATED						
3	BASE	PHENOLIC RESIN	1	NATURAL		SEE NOTE	TITLE:	PART NO.:	SK-12D18	
2	KNDB	POM	1	BLACK			SLIDE SWITCH / HORIZONTAL			
1	FRAME	STEEL STRIP	1	NI PLATED			DR: Ricky 2016/06/21	DWG NO.:		
							CHKD: Ricky 2016/06/21	ADL-12D18		
ND.	PARTS	MATERIAL	Q'TY	FINISHING			SCALE	SHEET	REV.	CUSTOMER DRAWING
	1						4/1	1/1	A	