

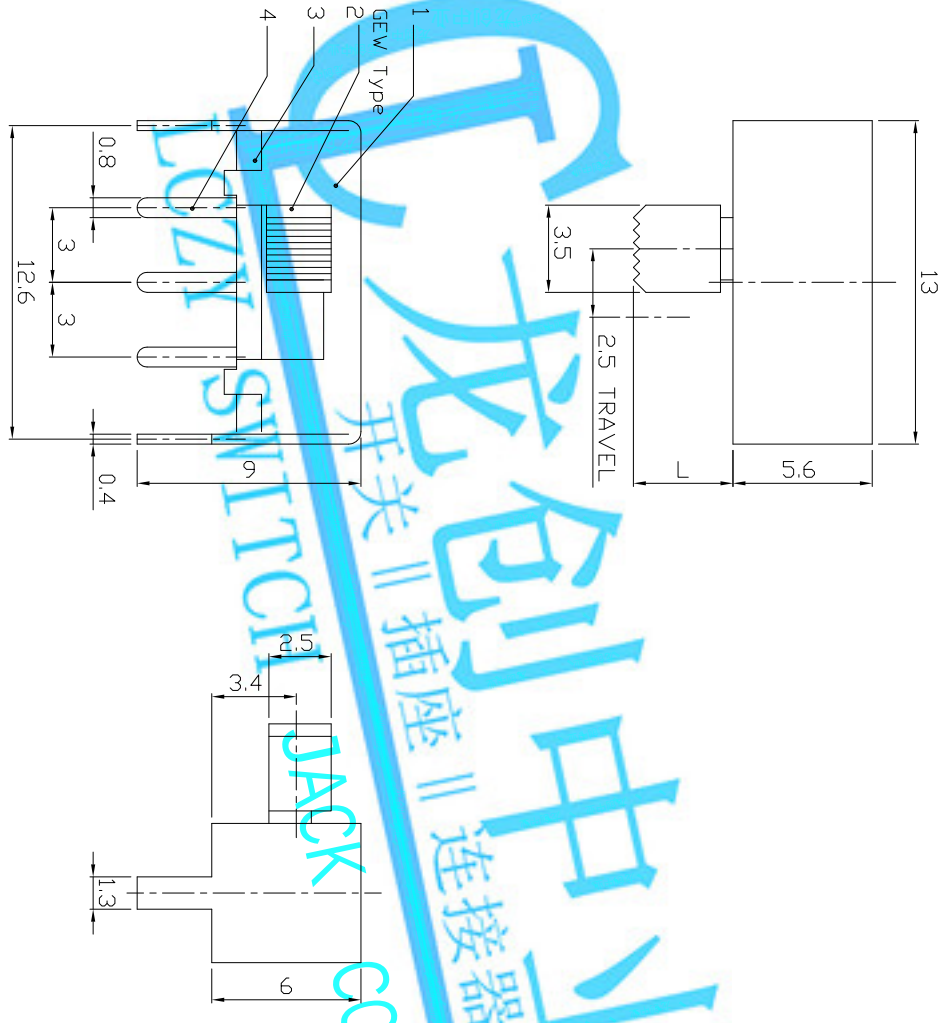


DIMENSIONS

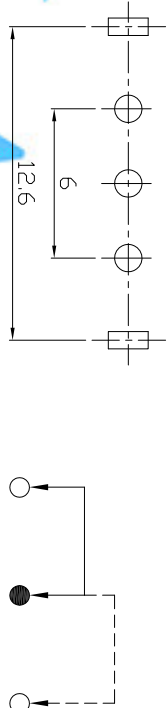

MODEL CODE

SS-12E12-GEW



P.C.B LAYOUT

BOTTOM VIEW

CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	1P2T
CONTACT RESISTANCE	30mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	2.5mm
OPERATING FORCE	200±100gf
OPERATING LIFE(cycles)	10,000

LONGCHUANG ZHONGYE (HK)CO.,LIMITED

8				WITHIN 1.5mm: ±0.1mm	UNITS	mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
7				OVER 1.5mm: ±0.2mm	MAT'L					
6	SPRING	SUS WIRE	1	NATURAL	SEE NOTE					
5	CONTACT	BRASS STRIP	1	AG PLATED						
4	TERMINAL	BRASS STRIP	1	AG PLATED	FINISH		TITLE:	SLIDE SWITCH / HORIZONTAL	PART NO.:	SS-12E12
3	TERMINAL BASE	PHENOLIC RESIN	1	NATURAL	SEE NOTE		DR:	2016/08/10	DWG NO.:	AZJ-12E12
2	KNOB	PBT	1	BLACK			CHKD:	2016/08/10	SCALE	SHEET 1/1
1	COVER	MILD STEEL	1	NI PLATED			APPD:		REV.	A
ND.	PARTS	MATERIAL	Q'TY	FINISHING					CUSTOMER	DRAWING