


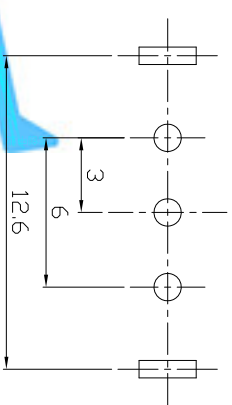
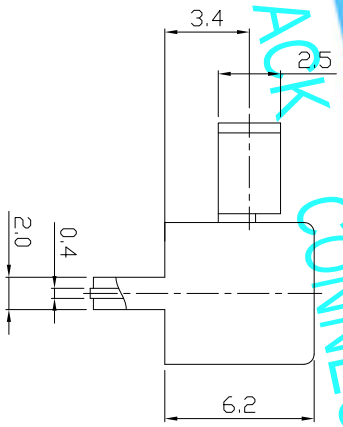


DIMENSIONS

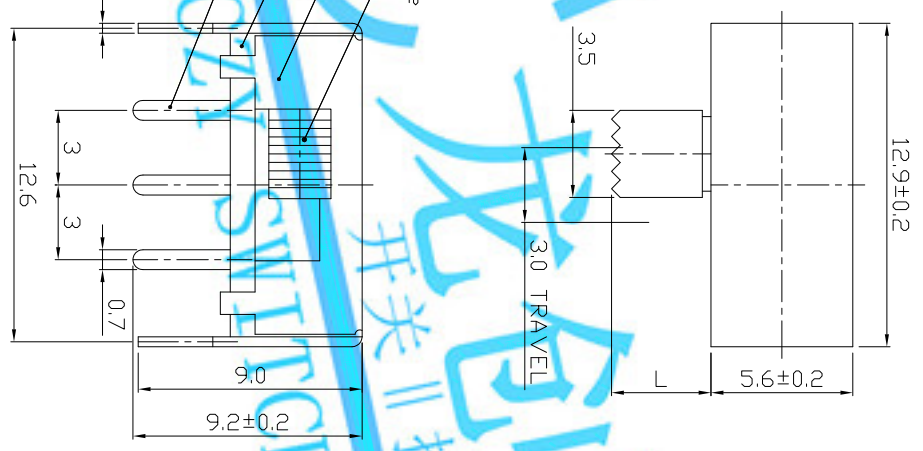

MODEL CODE

SK-12E14-GEW

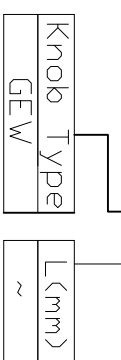

PCB LAYOUT
BOTTOM VIEW

CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.5A 50V DC
CIRCUIT	1P2T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	3mm
OPERATING FORCE	250±80gf
OPERATING LIFE(cycles)	10,000

8					WITHIN 1.5mm: ±0.1mm	UNITS	mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
7					OVER 1.5mm: ±0.2mm	MAT'L	SEE NOTE				
6	CONTACT (CLIP)	BRASS STRIP	1	SILVER PLATED			SEE NOTE				
5	SPRING	STEEL WIRE	1								
4	TERMINAL	BRASS STRIP	3	SILVER PLATED			FINISH	TITLE:	SLIDE SWITCH / HORIZONTAL	PART NO.:	SK-12E14
3	TERMINAL BASE	PHENOLIC RESIN	1	NATURAL			SEE NOTE	DR:	Rocky 2016/06/22	DWG NO.:	ADL-12E14
2	FRAME	IRON STRIP	1	NI PLATED			Q'TY	CHKD:	Rocky 2016/06/22	SCALE	SHEET 1/1
1	KNDB	PDM	1	BLACK			Q'TY	APPD:		REV.	A
ND.	PARTS	MATERIAL	Q'TY	FINISHING						CUSTOMER	DRAWING