


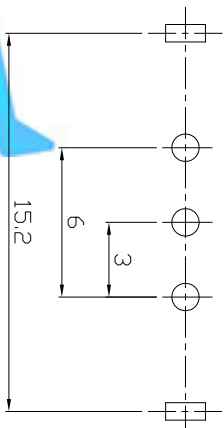
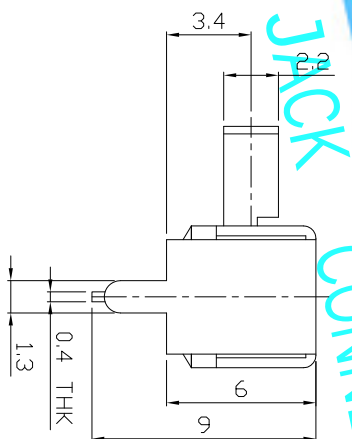


DIMENSIONS

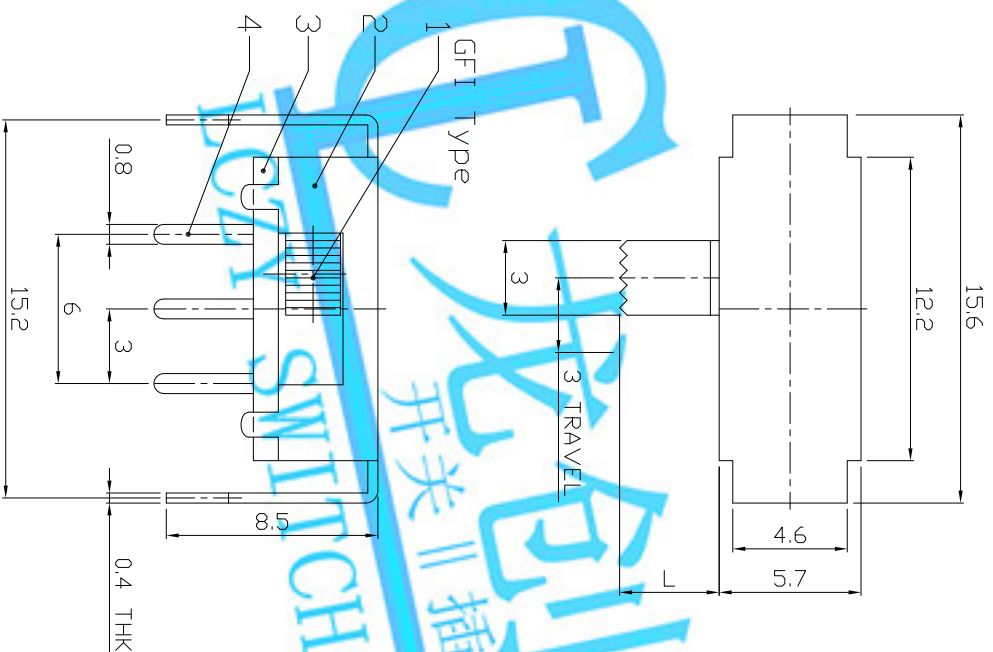

MODEL CODE

SK-12F02-GFI

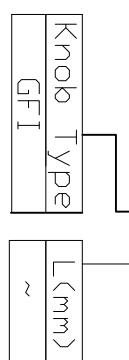

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.5A 50V DC
CIRCUIT	1P2T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	3mm
OPERATING FORCE	180±80gf
OPERATING LIFE(cycles)	10,000

8				WITHIN 1.5mm: ±0.1mm	UNITS	mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
7				OVER 1.5mm: ±0.2mm	MAT'L	SEE NOTE				
6	SPRING	BRASS STRIP	1	Ag PLATED		SEE NOTE				
5	CONTACT	STEEL STRIP	1	NATURAL		FINISH				
4	TERMINAL	BRASS STRIP	3	Ag PLATED		SEE NOTE				
3	BASE	PHENOLIC RESIN	1	NATURAL		DR: <i>Rocky</i> 2016/06/22	DWG NO.:	ADL-12F02	SCALE	1/1
2	FRAME	STEEL STRIP	1	NI PLATED		CHKD: <i>Rocky</i> 2016/06/22			REV.	A
1	KNDB	POM	1	BLACK		Q'TY	APPD:			CUSTOMER DRAWING
NO.	PARTS	MATERIAL	Q'TY	FINISHING	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR OTHERWISE TRANSMITTED WITHOUT THE WRITTEN CONSENT OF ACCURATE INNOTECH INC.					