
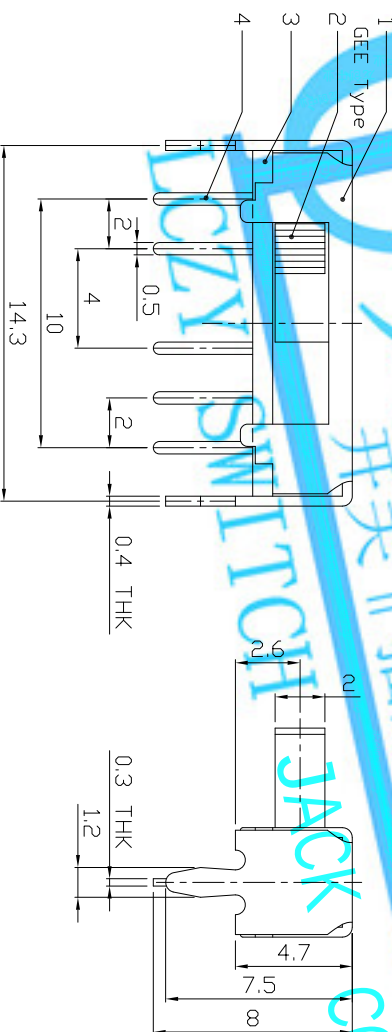
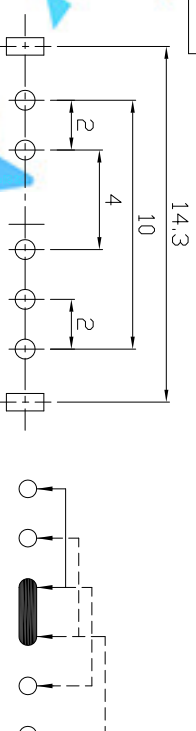
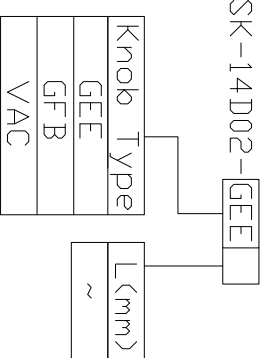




DIMENSIONS

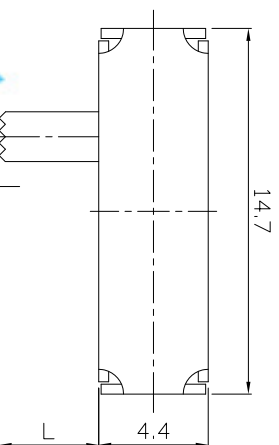

RATING	0.3A 50V DC
CIRCUIT	1P4T
CONTACT RESISTANCE	100m Ω MAX.
TIMING	SHORTING
TRAVEL	2mm
OPERATING FORCE	250 $\pm$ 100gf
OPERATING LIFE(cycles)	10,000

ELECTRO-MECHANICAL CHARACTERISTICS
Refer to additional specifications

Refer to additional specifications

LONGCHUANG ZHONGYE (HK)CO.,LIMITED										
TITLE:		PART NO:		SK-14D02						
SLIDE SWITCH / HORIZONTAL		DWG NO:								
DR: Rocky 2016/06/23				ADL-14D02						
CHKD: Rocky 2016/06/23										
APPD:				SCALE		SHEET		REV.		CUSTOMER DRAWING
				4:1		1/1		A		
UNITS mm										
WITHIN 1.5mm: ±0.1mm										
OVER 1.5mm: ±0.2mm										
MAT'L										
SEE NOTE										
FINISH										
SEE NOTE										
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF LONGCHUANG ZHONGYE (HK)CO.,LIMITED AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOVTECH INC.										
Q'TY										
										
NO.	PARTS	MATERIAL	Q'TY	FINISHING						
1	FRAME	STEEL STRIP	1	NI PLATED						
2	KNOB	PDM	1	BLACK						
3	BASE	PHENOLIC RESIN	1	NATURAL						
4	TERMINAL	BRASS STRIP	5	AG PLATED						
5	CONTACT CLIP	PBS STRIP	1	AG PLATED						
6	SPRING PLATE	SUS	1	NATURAL						
7										
E										
8										